Help Guide

IC Recorder ICD-PX370



Use this Help Guide when you have any questions on how to use your IC recorder.

Preparation Parts and controls HOME menu/OPTION menu Lusing the HOME menu Using the OPTION menu About folders and files Display window While the HOME menu is displayed While recording is in progress or on standby. While playback is in progress While the recording information is displayed While the current file information is displayed While the file search categories are displayed

Powe	er
- <u>Ins</u>	serting batteries
- <u>Us</u>	sing the IC recorder with the USB AC adaptor
- <u>Dis</u>	sconnecting the IC recorder from the USB AC adaptor
- <u>Tu</u>	urning the power on
_ <u>Tu</u>	urning the power off
Mem	ory card
L Ins	serting a memory card
<u>Makir</u>	ng the initial settings
Preve	enting unintentional operations
 - <u>Pla</u>	acing the IC recorder into the HOLD state (HOLD)
Re	eleasing the IC recorder from the HOLD state
Maint	taining the volume level (European model only)
L Ma	aintaining the moderate volume level (European models only)
Reco	ording
Reco	ording
 - <u>Re</u>	ecording with the built-in microphone
– <u>Ab</u>	pout the recording level guide
- <u>Mc</u>	onitoring the recording audio
- <u>Ad</u>	dditional operations available during recording
	nanging the file storage destination folder
Addit	tional recording operations/settings
- <u>Se</u>	electing a recording scene for an individual situation
- <u>Tip</u>	ps for better recording
- <u>De</u>	efault settings for the recording scenes of the Scene Select function
L Re	ecording automatically in response to the input sound volume – the VOR function
Reco	ording with other devices
- <u>Re</u>	ecording with an external microphone
L Re	ecording audio from an external device
	g external devices for recording

Playback					
Pla	aying				
-	Playing a file				
-	Selecting a file				
L	Additional operations available during playback				
Ad	Additional playback operations/settings				
-	Reducing noise in the playback audio to make human voices sound clearer – the Clear Voice function				
-	Using the transcription playback mode				
-	Adjusting the playback speed – the DPC (Digital Pitch Control) function				
-	Selecting the playback mode				
-	Specifying a segment of a file to play repeatedly (A-B repeat)				
-	Continually playing the current file (Button-hold repeat playback)				
-	Specifying the playback range in the stored file list				
-	Listening to sound with better quality				
-	Searching forward/backward (Cue/Review)				
L	Locating the desired playback point quickly (Easy Search)				
Εc	liting				
De	eleting				
-	<u>Deleting a file</u>				
-	Deleting all files in the searched folder or list				
L	Deleting a folder				
Or	ganizing files				
-	Moving a file to a different folder				
-	Copying a file to a different folder				
	<u>Creating a folder</u>				
Using track marks					
	Adding a track mark				
-					

L	Deleting all the track marks in the selected file at one time
Div	ding files
- !	<u>Dividing a file at the current playback point</u>
L	<u>Dividing a file at all the track mark points</u>
Pro	tecting a file
Set	tings menu
Usi	ng the Settings menu
L	<u>List of the Settings menu items</u>
Ме	nu items with selectable setting items
-	Selecting the recording mode (REC Mode)
-	Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity)
- !	Reducing noise during recording (Recording Filter)
	Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)
	Turning the operation indicator on or off (LED)
- 3	Selecting the display language (Language)
	Setting the clock (Date&Time)
	Selecting the date display format (Date Display Format)
- 3	Selecting the clock display format (Time Display)
	Turning the beep sound on or off (Beep)
- 3	Setting the time period before the IC recorder automatically turns off (Auto Power Off)
- 1	Resetting all menu settings to the default ones (Reset All Settings)
- 1	Formatting the memory (Format Built-In Memory/Format SD Card)
	Checking the remaining recording time (Available Rec. Time)
L	Checking the information about the IC recorder (System Information)
Co	mputer
Cor	nnecting the IC recorder to a computer
Dis	connecting the IC recorder from the computer
Ct	icture of folders and files

Copying music files from a computer to the IC recorder				
Playing music files on the IC recorder that were copied from a computer				
Using the IC recorder as a USB storage device				
Software				
What you can do with Sound Organizer 2 (for Windows only)				
System requirements for Sound Organizer 2				
Installing Sound Organizer 2 (for Windows only)				
The Sound Organizer 2 window (for Windows only)				
Specifications				
Compatible memory cards				
System requirements				
Technical specifications				
Maximum recording time				
Maximum playback time/number of music files				
Battery life				
Announcements				
<u>Precautions</u>				
Safety regulations				
<u>Trademarks</u>				
Notice for users				
<u>License</u>				
Support website				
Customer support websites				
If you have problems/Troubleshooting				
Troubleshooting				
Noise				
The recorded file is noisy and is hard to understand.				
- The recorded file is noisy and you want to record with less noise.				
- A rustling noise is recorded.				


A buzzing or humming noise is recorded. Noise is recorded when you use an external microphone (not supplied) for recording. You hear noise when using headphones (not supplied) for playback. The volume of the audio you recorded from an external device is low or you hear squeaking noises when you listen to the audio via the built-in speaker. You hear noise during playback even with the Clear Voice function turned on. Power The IC recorder does not turn on or pressing any button does not work. The IC recorder does not turn off. - The IC recorder automatically turns off. The battery life is short. General operations The IC recorder does not operate correctly. The operation indicator does not light. Recording You cannot record a file. Recording is interrupted. The input audio volume is too loud or not loud enough when you record audio from an external device. Playback The playback volume is low. - You hear no sound from the built-in speaker. You hear sound from the built-in speaker even when headphones (not supplied) are connected. Playback speed is too fast or too slow. **Editing** You cannot divide a file. - You cannot move a file. - You cannot copy a file to a different folder. The folder or file you created is not displayed. Clock The recording date of a file appears as "----/--" or "--:--." The clock setting is reset.

Display The remaining recording time on the display window is shorter than the one displayed on the computer. Files The "Memory Full" message appears and you cannot start recording. - The "File Full" message appears and you cannot operate the IC recorder. The microSD card is not detected. Computer A folder or file name appears in unreadable characters. Copying a file takes time. The IC recorder is not detected by the computer and you cannot transfer folders/files from the computer. The file you transferred from the computer does not appear on the IC recorder and you cannot play the file. L The computer does not start. Software operations (Sound Organizer 2) You cannot install Sound Organizer 2. The IC recorder is not detected by Sound Organizer 2. The playback volume of the computer is low or you hear no audio from the computer. You cannot play or edit stored files. The counter or slider does not operate correctly or you hear noise. Operations slow down as the number of stored files increases. The computer seems to freeze while a file is being saved, added, or deleted. Sound Organizer 2 freezes during start-up. List of messages **System limitations**

Help Guide

IC Recorder ICD-PX370

Parts and controls

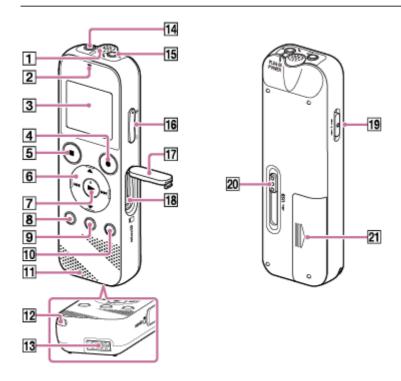

- 1. Built-in microphone (monaural)
- 2. Operation indicator
- 3. Display window
- 4. REC/PAUSE (record/pause) button
- **5.** STOP button
- **6.** Control button (▲ DPC (Digital Pitch Control), ▼ ←A-B (repeat A-B)/ ◄◄ (review/fast backward), ▶► (cue/fast forward))
- 7. ► (play/enter) button (*)
- 8. BACK/ HOME button (: press, : press and hold)
- 9. T-MARK (track mark) button
- 10. OPTION button
- 11. Built-in speaker
- **12.** Strap hole (No strap is supplied with your IC recorder.)
- 13. USB connector compartment
- 14. ∩ (headphones) jack
- **15. ९** (microphone) (PLUG IN POWER) jack (*)

- **16.** VOL -/+ (volume -/+) button (*)
- 17. Slot cover
- 18. microSD card slot (The card slot is located under the cover.)
- 19. HOLD•POWER switch
- 20. USB slide lever
- 21. Battery compartment
- * The \(\bigcup \)(play/enter) button, VOL \(-/+\) (volume \(-/+)\) button, and \(\bigcup \)(microphone) (PLUG IN POWER) jack have a tactile dot. Use the tactile dot as a reference when operating the IC recorder.


Help Guide

IC Recorder ICD-PX370

Using the HOME menu

On your IC recorder, the HOME menu is the starting point for all functions.

The HOME menu allows you to select a function, search for recorded files, or change the settings on the IC recorder.



1 Press and hold BACK/HOME.

The HOME menu appears.



You can select the following functions:

☐ Music:

You can select music files imported from a computer for playback.

To locate a music file, you can select one of the file search categories: "All Songs," "Albums," "Artists," and "Folders."

Recorded Files:

You can select files recorded by the IC recorder for playback.

To locate a recorded file, you can select one of the file search categories: "Latest Recording," "Search by REC Date," "Search by REC Scene," and "Folders."

Record:

You can display the recording standby screen. To start recording, press ● REC/PAUSE.

Settings:

You can display the Settings menu and change various settings on the IC recorder.

Return to XX(*):

Select this function to return to the screen before you displayed the HOME menu.

* The function you are currently using is displayed in "XX."



While the HOME menu is on the display window, you can press ■ STOP to return to the screen before you displayed the HOME menu.

Related Topic

Using the OPTION menu

Help Guide


IC Recorder ICD-PX370

Using the OPTION menu

You can display the OPTION menu by pressing OPTION. The OPTION menu items vary depending on the selected function of your IC recorder.

Note

The OPTION menu may not appear, depending on the screen on the display window.



1 Select the function you want to use on the HOME menu, and then press OPTION.

The OPTION menu associated with the selected function appears.



- 2 Press ▲ or ▼ to select the desired menu item, and then press ►.
- Press ▲ or ▼ to select the desired setting, and then press ►.

Hint

To return to the previous screen, press BACK/HOME while the OPTION menu is on the display window.

Related Topic

Using the HOME menu

Help Guide


IC Recorder ICD-PX370

About folders and files

The following illustrates the structure of folders and files that you can view on your IC recorder.


Under "☐ Recorded Files"

"FOLDER01": Files recorded via the built-in microphone are stored.

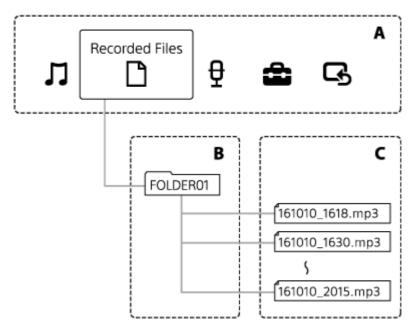

- A: HOME menu
- B: Folders
- C: Files

Under " 🞵 Music"

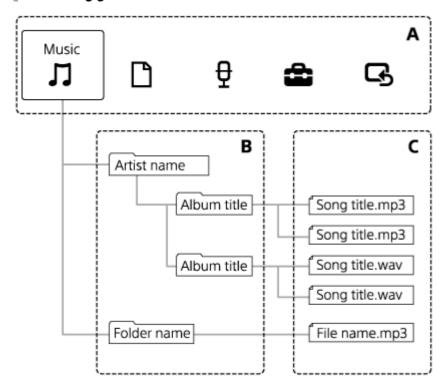

A: HOME menu B: Folders

C: Files

Related Topic


- Moving a file to a different folder
- Copying a file to a different folder
- Structure of folders and files

Help Guide

IC Recorder ICD-PX370

While the HOME menu is displayed

The following describes the HOME menu on the display window.



Note

- The above screen is provided for explanatory purposes. It may look different from what you actually see on your IC recorder.
- 1. HOME menu items

You can select one of the following:

: Music

☐ : Recorded Files ☐ : Record

: Settings

Return to XX (The function you are currently using is displayed in "XX.")

Related Topic


Using the HOME menu

Help Guide

IC Recorder ICD-PX370

While recording is in progress or on standby

The following describes the display window while recording is in progress or on standby.

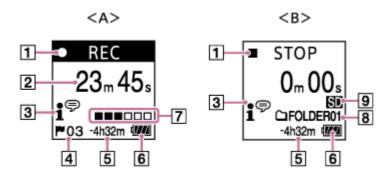

A: While recording is in progress

B: While recording is on standby

Note

- The above screen is provided for explanatory purposes. It may look different from what you actually see on your IC recorder.
- Recording status indicator

Indicates the current recording status of your IC recorder.

■ REC : recording■ PAUSE : paused■ STOP : stopped

2. Elapsed time

Indicates the elapsed time of the current recording.

3. Scene Select indicator

Indicates the recording scene that is currently selected.

: Auto Voice Rec

: Meeting
: Lecture
: Voice Notes

: Interview

4. Track mark number

Indicates the number of added track marks.

5. Remaining recording time

Indicates the remaining time available for recording in hours, minutes, and seconds.

10 hours or more: no indication

10 minutes to 10 hours: indicated in hours and minutes Less than 10 minuets: indicated in minutes and seconds

- 6. Battery indicator
- 7. Recording level guide

Indicates the current recording volume level of input sound for your reference.

8. File storage destination folder

Indicates the destination folder for storing recorded files.


9. Memory storage indicator Appears when the memory card is selected for storing recorded files.

Help Guide

IC Recorder ICD-PX370

While playback is in progress

The following describes the display window during playback.

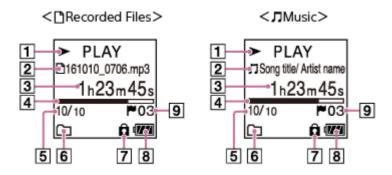

Note

- The above screens are provided for explanatory purposes. They may look different from what you actually see on your IC recorder.
- 1. Playback status indicator

Indicates the current playback status of your IC recorder.

► PLAY : playing

: reviewing (fast-rewinding)/cueing (fast-forwarding)

■ STOP : on standby

If the playback speed is modified, the DPC (Digital Pitch Control) speed will be indicated to the right of ▶ or ■.

2. File information

Indicates information about the file you are playing.

Files recorded with your IC recorder are indicated as follows:

File name: recording date_recording time.file format (e.g. 161010_0706.mp3)

Music files are indicated as follows:

☐: Song title/Artist name

3. Elapsed time

Indicates the elapsed time of the current playback.

4. Playback progress bar

Indicates how far playback of the file has progressed.

5. File number information

Indicates the file number of the playing file in the format (current file number)/(total number of files to play).

6. Play Mode/Playback Range indicator

No indication: Normal (Play Mode)

: Repeat (Play Mode)
1 : 1 File Play (Play Mode)
1 : 1 File Repeat (Play Mode)

📩 :Shuffle (Play Mode)

Shuffle Repeat (Play Mode)
: Selected Range (Playback Range)

7. Protect indicator

Indicates that the file you are playing is protected.

- 8. Battery indicator
- **9.** Track mark number Indicates the track mark number, if added, of the current playback point.

Help Guide

IC Recorder ICD-PX370

While the recording information is displayed

You can view the recording information of your IC recorder, including the remaining recording time, the memory storage for recorded files, and the folder setting.

To display the recording information, while recording is on standby, select "REC Information" on the OPTION menu, and then press ►.



The following recording information is available:

Available Rec. Time:

Remaining time available for recording.

Recording Memory:

Memory storage ("Built-In Memory" or "SD Card") for recorded files.

Recording Folder:

Storage folder for recorded files.

Scene Select:

Recording scene currently selected.

If the default settings for the Scene Select function are modified, "*" will appear to the left of the recording scene.

For information about the default settings, see Default settings for the recording scenes of the Scene Select function.

REC Mode:

Recording mode currently selected.

Input:

Audio input type currently selected.

Mic Sensitivity:

Sensitivity level of the microphone currently selected.

Recording Filter:

Recording filter currently selected.

VOR:

VOR (Voice Operated Recording) setting currently selected.

Auto Track Marks:

Automatic track mark setting currently selected.

Hint

■ While recording is on standby, you can press ■ STOP to view the recording information of your IC recorder.

Help Guide

IC Recorder ICD-PX370

While the current file information is displayed

You can view the information (recording date and time, file length, etc.) about the recorded file you selected.

Note

The following screens are provided for explanatory purposes. They may look different from what you actually see on your IC recorder.

To view the information about a particular file, select a file you recorded with your IC recorder or a music file and select "File Information" on the OPTION menu. Then, you can press ▲ or ▼ to scroll up or down to view the following:

Information about the recorded file



- Rec Date/Time: Date and time when the file was recorded (year/month/day/time).
- File Length: Playback length of the file indicated in hours, minutes, and seconds.
- Model Name: Device by which the file was recorded. The same information for "Model:" in the "System Information" of the Settings menu appears.
- Scene Select: Recording scene selected at the time of recording.
- REC Mode: Recording mode selected at the time of recording.
- Mic Sensitivity: Sensitivity level of the microphone selected at the time of recording.
- Recording Filter: Recording filter selected at the time of recording.
- VOR: VOR (Voice Operated Recording) setting selected at the time of recording.
- Input: Audio input type ("Built-In Mic," "External Mic," or "Audio IN") selected at the time of recording.
- Location: Memory storage containing the file.
- File Path: Path to the file.

Information about the music file



- File Length: Playback length of the file indicated in hours, minutes, and seconds.
- Codec: Codec type for music files.
- Bit Rate: Bit rate for music files.
- Sample Rate: Sampling rate for music files.
- Bit Depth: Bit depth for music files.
- Location: Memory storage containing the file.
- File Path: Path to the file.

Help Guide

IC Recorder ICD-PX370

While the file search categories are displayed

When you select "The Recorded Files" or "The Music" on the HOME menu, the search categories of the stored files appear on the display window.

Note

The following screens are provided for explanatory purposes. They may look different from what you actually see on your IC recorder.

When " Recorded Files" is selected



You can select one of the following search categories:

Latest Recording:

Starts playing the latest recording.

Search by REC Date:

Recorded files are sorted by recording date.


Search by REC Scene:

Recorded files are sorted by recording scene.

Folders

Recorded files in the selected folder are listed.

When " ☐ Music" is selected



You can select one of the following search categories:

All Songs:

All music files are listed.

Albums:

Music files are sorted by album title.

Artists:

Music files are sorted by artist name.

Folders:

Music files in the selected folder are listed.

Help Guide


IC Recorder ICD-PX370

Inserting batteries



Insert batteries.

Slide and lift the battery compartment lid in the direction of arrow, insert the supplied LR03 (size AAA) alkaline batteries with the correct polarity, and then close the lid.



Note

- Before replacing batteries, be sure to turn off your IC recorder.
- When replacing batteries, be sure to use two brand-new alkaline batteries or two fully charged rechargeable batteries.
- Your IC recorder is not capable of charging rechargeable batteries. Use the battery charger (not supplied) for battery charging.

Hint

- Your IC recorder supports the following:
 - LR03 (size AAA) alkaline battery (Two batteries are supplied with your IC recorder.)
 - Rechargeable battery (size AAA, not supplied)


Help Guide

IC Recorder ICD-PX370

Using the IC recorder with the USB AC adaptor

You can use your IC connector with a USB AC adaptor (not supplied) connected to an AC outlet. It is helpful to use the IC recorder with AC power when you want to record for a long time.







A: USB AC adaptor (not supplied)

Note

- While recording is in progress (the operation indicator lights in red) or paused (the operation indicator flashes in red), or while data is being accessed (the "Accessing" message is on the display window), observe the following to avoid data corruption:
 - Do not connect/disconnect your IC recorder to/from the USB AC adaptor while the adaptor is connected to an AC outlet.
 - Do not connect/disconnect the USB AC adaptor to/from an AC outlet while your IC recorder is connected to the adaptor.
- Be sure to connect the USB AC adaptor to a power outlet within reach so that you can immediately disconnect it when you detect any malfunctions.

Related Topic

- Disconnecting the IC recorder from the USB AC adaptor
- Battery life

Help Guide

IC Recorder ICD-PX370

Disconnecting the IC recorder from the USB AC adaptor

Be sure to follow the procedure below, otherwise you may not be able to play the files stored on your IC recorder due to data corruption.

- If recording or playback is in progress, press STOP to stop the IC recorder.
- Make sure that the "Accessing" message is not on the display window.
- 3 Disconnect the IC recorder from the USB AC adaptor, and then disconnect the USB AC adaptor from the AC outlet.

Note

- While recording is in progress (the operation indicator lights in red) or on standby (the operation indicator flashes in red), or while data is being accessed (the "Accessing" message is on the display window), observe the following to avoid data corruption:
 - Do not connect/disconnect your IC recorder to/from the USB AC adaptor while the adaptor is connected to an AC outlet.
 - Do not connect/disconnect the USB AC adaptor to/from an AC outlet while your IC recorder is connected to the adaptor.

Related Topic

Using the IC recorder with the USB AC adaptor


Help Guide

IC Recorder ICD-PX370

Turning the power on

1

Slide the HOLD•POWER switch to "POWER" and hold it until the display window turns on.



Hint

The Auto Power Off function on your IC recorder is set to "10min" by default to save battery power. If you leave the IC recorder unused for 10 minutes, it will automatically turn off.

Related Topic

Turning the power off


Help Guide

IC Recorder ICD-PX370

Turning the power off

1

Slide the HOLD•POWER switch to "POWER" and hold it until "Power Off" appears on the display window.



Note

Before you replace the batteries, be sure to turn off the power.

Hint

The Auto Power Off function on your IC recorder is set to "10min" by default to save battery power. If you leave the IC recorder unused for 10 minutes, it will automatically turn off.

Related Topic

Turning the power on


Help Guide

IC Recorder ICD-PX370

Inserting a memory card

In addition to the built-in memory, you can record files on a microSD card (not supplied).

Make sure that no IC recorder operations are in progress, and then open the cover of the microSD card slot.



Hold a microSD card with the terminal side facing toward you and insert it into the microSD card slot until it clicks into place.



Close the cover of the microSD card slot.

Note

- Your IC recorder does not support microSDXC cards.
- If the microSD card is not detected by your IC recorder, remove it from the slot and then insert it back in.
- Successful operations with all types of supported microSD cards are not guaranteed.
- Keep any liquid and any metal or flammable object away from the microSD card slot to avoid a fire or shock hazard or malfunctions of your IC recorder.
- Before you start recording with a microSD card, we recommend that you copy all the data stored on the memory card to a computer and format the memory card on your IC recorder so it contains no data. For instructions on formatting the microSD card, see Formatting the memory (Format Built-In Memory/Format SD Card).

Hint

To remove the memory card, push the microSD card into the slot. When it pops out, remove it from the microSD card slot.

Related Topic


- Structure of folders and files
- Compatible memory cards

Help Guide

IC Recorder ICD-PX370

Making the initial settings

When you turn on your IC recorder for the first time, the Configure Initial Settings screen appears on the display window. You can then select the display language, set the clock, and turn on/off the beep sound.



Press

to select "Yes."



Press ▲ or ▼ to select the display language, and then press ▶.

You can select from the following languages:

Deutsch (German), English, Español (Spanish), Français (French), Italiano (Italian), Русский (Russian), Türkçe (Turkish), 한국어 (Korean), 简体中文 (Simplified Chinese), 繁體中文 (Traditional Chinese).

3 Set the current date and time.

Press ▲ or ▼ to set an item, and then press ▶.

Repeat the actions to set all items.

To move the focus backward or forward, press ◄◄or►►. You can also press BACK/HOME to move the focus to the previous item.

When you are finished with the last item, press ▶ to apply the settings to the clock.



Press ▲ or ▼ to select "Next," and then press ►.

The setting window for turning the beep sound on or off is displayed.

Fress ▲ or ▼ to select "ON" or "OFF" to turn on or off the beep sound, and then press ►.



When the initial settings finish, the completion message and then the HOME menu appears.

Note

- The default date display format depends on the country or region of your purchase.
- The clock may tell the time either in 12-Hour format with "AM" or "PM" or in the 24-Hour format, depending on the selected clock display format (Time Display) on the Settings menu. In addition, the default clock display format depends on the country or region of your purchase.
- The number of language options you can select and the default setting differ depending on the country or region of your purchase.

Hint

- You can change the clock setting and the beep sound setting at any time later by selecting " Settings" "Common Settings" from the HOME menu.
- Once you have removed the batteries from the compartment and inserted them back in or you have replaced the batteries with new ones, the Set Date/Time screen appears on the display widow. On this screen, you see the date and time of the last operation you made with your IC recorder before you removed the batteries. Be sure to change the date and time to the current ones.
- When you are finished with the initial settings, placing your IC recorder into the HOLD state displays the current date and time on the display window.

Related Topic

- Setting the clock (Date&Time)
- Turning the beep sound on or off (Beep)
- While the HOME menu is displayed

Help Guide


IC Recorder ICD-PX370

Placing the IC recorder into the HOLD state (HOLD)

You can disable all the buttons (HOLD) on your IC recorder in order to prevent unintentional operations while you carry around the IC recorder.



Slide the HOLD•POWER switch to "HOLD."



While the IC recorder is turned on, sliding the HOLD•POWER switch to "HOLD" displays "HOLD" and the current time for approximately 3 seconds on the display window, indicating that all the buttons are disabled.



Note

- Placing your IC recorder into the HOLD state disables all the buttons. Be sure to release it from the HOLD state before you use the IC recorder again.
- The clock may tell the time either in 12-Hour format with "AM" or "PM" or in the 24-Hour format, depending on the selected clock display format (Time Display) on the Settings menu. In addition, the default clock display format depends on the country or region of your purchase.

Related Topic

Releasing the IC recorder from the HOLD state

Help Guide

IC Recorder ICD-PX370


Releasing the IC recorder from the HOLD state

When all the buttons on your IC recorder are disabled, pressing any button displays "HOLD... Slide HOLD Switch to Activate." on the display window.



Release the IC recorder from the HOLD state before you use it.

1 Slide the HOLD•POWER switch to the center dot.



Related Topic

Placing the IC recorder into the HOLD state (HOLD)

Help Guide

IC Recorder ICD-PX370

Maintaining the moderate volume level (European models only)

The IC recorder limits the maximum volume to allow you to listen to the sound at a moderate volume level when using the headphones. When you try to adjust the volume to a level that exceeds the specified level, the "Check The Volume Level" message appears.




Check The Volume Level

Help Guide

IC Recorder ICD-PX370

Recording with the built-in microphone

The following describes the basic recording steps with the selected sensitivity level of the built-in microphone and recording mode.



Note

If you accidentally touch your IC recorder or let an object come in contact with it while recording is in progress, rustling or scratching noises may be recorded.


Hint

- Before you start recording, we recommend you first make a trial recording or monitor the recording. For instructions on monitoring the recording, see Monitoring the recording audio.
- Recorded files are stored in "FOLDER01" under " Recorded Files" by default. To change the file storage destination folder for recorded file, see Changing the file storage destination folder.
- 1 Select " ₽ Record" on the HOME menu, and then press ▶.

The recording standby screen appears on the display window.



2 Turn your IC recorder so that its built-in microphone (①) points in the direction of the target sound source.





3 Press ● REC/PAUSE.


The Record screen appears to indicate that recording has started, and the operation indicator (②) lights in red. If you press and hold ● REC/PAUSE, the IC recorder will pause. It will not start recording.



While recording is in progress, the recording level guide ($\mathfrak 3$) is displayed on the Record screen.

As illustrated below, three or four black squares () on the recording level guide indicate the optimum recording volume levels for the sound source. Adjust the orientation of the built-in microphone, the distance from the sound source, or the sensitivity setting of the microphone to keep the volume within the optimum range.

For more information about the recording level guide, see About the recording level guide.



4 Press ■ STOP to stop recording.

The "Saving..." message and then the recording standby screen appear.

Now you can press ▶ to play the file you have just recorded.

Note

While the "Saving..." message is on the display window, your IC recorder is saving the file to the memory storage. If the IC recorder is running on AC power, do not disconnect the USB AC adaptor (not supplied) to avoid data corruption.

Hint

- You can still press REC/PAUSE to start recording while playback is in progress or a menu is on the display window.
- You can still press REC/PAUSE to pause the ongoing recording while a menu is on the display window.
- Recorded files are named as "(recording date)_(recording time).(file format)" (e.g. 161010_0706.mp3).
- While playback is in progress or on standby, you can press and hold REC/PAUSE to make your IC recorder pause for recording. This helps you adjust the recording volume level without recording unnecessary audio data.


_	Additional	operations	available	during	record	linc
•	Additional	Operations	avallable	uuiiiu	166014	ill IC

Help Guide

IC Recorder ICD-PX370

About the recording level guide

While recording is in progress, the recording level guide (①) appears on the Record screen.



As illustrated above, three or four black squares () on the recording level guide indicate the optimum recording volume levels for the sound source. Adjust the orientation of the built-in microphone, the distance from the sound source, or the sensitivity setting of the microphone to keep the volume within the optimum range. See Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity) for selecting the microphone sensitivity level.

Hint

- When the input sound volume is low, it is recommended you move your IC recorder closer to the sound source or increase the microphone sensitivity level.
- While playback is in progress or on standby, you can press and hold REC/PAUSE to make your IC recorder pause for recording. This helps you adjust the recording volume level without recording unnecessary audio data.

Related Topic


Recording with the built-in microphone

Help Guide

IC Recorder ICD-PX370

Monitoring the recording audio

You can monitor the ongoing recording by connecting headphones (not supplied) to the ∩ (headphones) jack.



- **1** Connect headphones (not supplied) to the ∩ (headphones) jack.
- Press VOL -/+ to adjust the monitoring volume.
 Changing the monitoring volume does not affect the recording volume.

Related Topic

Recording with the built-in microphone

Help Guide

IC Recorder ICD-PX370

Additional operations available during recording

You can perform the following operations during recording.

To pause a recording

Press ● REC/PAUSE.

While a recording is paused, the operation indicator flashes in red and If you leave the recording paused for 1 hour, it will stop automatically.

To restart the recording from a pause

Press ● REC/PAUSE again.

The recording restarts from the paused point. (To completely stop recording after you paused the recording, press **STOP**.)

To review the ongoing recording from the beginning

While recording is on standby, press ▶.

The recording stops and plays from the beginning.

Related Topic

Recording with the built-in microphone

Help Guide

IC Recorder ICD-PX370

Changing the file storage destination folder

By default, the recorded files via the built-in microphone are stored in "FOLDER01" under " Recorded Files." You can change this storage folder setting by following the steps below:

Select "Settings" - "Recording Settings" - "Recording Folder" from the HOME menu, and then press



The Memory Selection screen appears.

Press ▲ or ▼ to select "Built-In Memory" or "SD Card," and then press ▶.



3 Press ▲ or ▼ to select the desired folder, and then press ▶.

Hint

For instructions on creating a new folder, see Creating a folder.

Help Guide

IC Recorder ICD-PX370

Selecting a recording scene for an individual situation

According to a particular recording situation, you can change some recording settings, including the recording mode and the sensitivity level of the built-in microphone, at once by selecting one of the recording scenes (Scene Select).



While recording is on standby, select "Scene Select" on the OPTION menu, and then press ▶.



Press ▲ or ▼ to select a scene you want, and then press ►.



Description of menu items

You can select one of the following items:

Scene Select Off:

Available for the situation where no recording scene selection is required.

♣ Auto Voice Rec:

Suitable for recording human voices in general (default setting).

Meeting:

Suitable for recording human voices in large spaces, including conference rooms.

Lecture:

Suitable for recording seminars and lectures.

₽ Voice Notes:

Suitable for speaking into the built-in microphone to record voice notes.

Interview:

Suitable for recording human voices from a distance of 1 to 2 meters (40 to 80 inches), such as interviews and small meetings.

Related Topic

- Default settings for the recording scenes of the Scene Select function
- List of the Settings menu items

Help Guide

IC Recorder ICD-PX370

Tips for better recording

Recording at a meeting

Place your IC recorder close to speakers of the meeting. You can reduce noise (vibrations from the desk, etc.) by placing the IC recorder on a soft cloth, such as a handkerchief.

For recording a meeting, it is suitable to select "Auto Voice Rec" or "Meeting" of the Scene Select function.



Recording a lecture/presentation

Place your IC recorder so that its built-in microphone points in the direction of the lecturer/presenter. For recording a lecture/presentation, it is suitable to select "Lecture" of the Scene Select function.



Recording a voice note

When you speak into the built-in microphone, hold your IC recorder slightly off to the side of your mouth so that the built-in microphone will not pick up breathing noises.

For recording a voice note, it is suitable to select "Auto Voice Rec" or "Voice Notes" of the Scene Select function.

Note

While you are holding your IC recorder, make sure that the built-in microphone will not pick up rustling noises.



Recording an interview

Place your IC recorder so that the built-in microphone points in the direction of the interviewee. For recording an interview, it is suitable to select "Auto Voice Rec" or "Interview" of the Scene Select function.



Related Topic

- Selecting a recording scene for an individual situation
- Reducing noise during recording (Recording Filter)
- Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity)

Help Guide

IC Recorder ICD-PX370

Default settings for the recording scenes of the Scene Select function

By default, the settings for the recording scenes of the Scene Select function are as follows:

	i [©] Auto Voice Rec	Meeting	Lecture	y Voice Notes
REC Mode	MP3 192kbps	MP3 192kbps	MP3 192kbps	MP3 128kbps
Built-In Mic Sensitivity	Auto	Medium	Medium	Low
Ext. Input Setting(MIC IN)	Auto	Medium	Medium	Low
VOR	OFF	OFF	OFF	OFF
Recording Filter	LCF(Low Cut)	NCF(Noise Cut)	NCF(Noise Cut)	LCF(Low Cut)

	Interview	OFF
REC Mode	MP3 128kbps	MP3 192kbps
Built-In Mic Sensitivity	Medium	Medium
Ext. Input Setting(MIC IN)	Medium	Medium
VOR	OFF	OFF
Recording Filter	NCF(Noise Cut)	OFF

Related Topic


Selecting a recording scene for an individual situation

Help Guide

IC Recorder ICD-PX370

Recording automatically in response to the input sound volume – the VOR function

You can set your IC recorder to automatically start when the input sound volume reaches the predefined level, and pause when the volume decreases below the level.





2 Press ▲ or ▼ to select "ON," and then press ►.

"VOR" is set to "OFF" by default.

- **③** Press REC/PAUSE.
 - REC appears on the display window.

When the input sound volume decreases below the predefined level, flashing PAUSE appears and the recording pauses. When the volume reaches the level once again, the recording restarts.

Note

The VOR function is affected by the ambient sound conditions. Select the sensitivity level of the built-in microphone suitable to your ambient sound conditions. For instructions on selecting the sensitivity level, see Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity).

If the selected sensitivity level does not work as you expected or when you want make an important recording, follow the above steps to set "VOR" to "OFF."

Hint

To cancel the VOR function setup process, set "VOR" to "OFF" in step 2.

Related Topic

Recording audio from an external device


Help Guide

IC Recorder ICD-PX370

Recording with an external microphone

You can connect an external microphone to your IC recorder and use it for recording.

While no IC recorder operations are in progress, connect an external microphone (⊕) to the (microphone) jack.



- "Ext. Input Setting" appears on the display window. If not, select " Settings" "Recording Settings" "Ext. Input Setting" from the HOME menu.
- Press ▲ or ▼ to select "MIC IN," and then press ▶.
- Press REC/PAUSE to start recording.

The built-in microphone is disabled and audio via the external microphone is recorded. If the input audio volume is not loud enough, select "Settings" - "Recording Settings" - "Ext. Input Setting" - "MIC IN" - "Sensitivity setting" from the HOME menu to change the sensitivity level of the external microphone. When a plug in power type microphone is connected, power is automatically supplied to the microphone from the IC recorder.

Related Topic

- Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)
- Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity)

Help Guide

IC Recorder ICD-PX370


Recording audio from an external device

You can make music files without using a computer by recording audio/music from the device (a radio cassette recorder, a tape recorder, TV, etc.) connected to your IC recorder.

Hint

- If the input audio volume is not loud enough, connect the audio connection cable from your IC recorder to the headphones jack (stereo mini-jack) on the external device, adjust the volume of the external device while checking on the recording level guide on the IC recorder's display window.
- While no IC recorder operations are in progress, connect an external device (⊕) to the (microphone) jack on the IC recorder.

Use an audio connection cable to connect the audio output jack (stereo mini-jack) on the external device and the (microphone) jack on the IC recorder.



"Ext. Input Setting" appears on the display window. If not, select " Settings" - "Recording Settings" - "Ext. Input Setting" from the HOME menu.

- Press ▲ or ▼ to select "Audio IN," and then press ►.
- 3 Press REC/PAUSE to start recording.
 - REC appears on the display window and the IC recorder starts recording audio from the connected external device.
- 4 Start playback on the connected external device.

Related Topic

- Recording the playback audio of the IC recorder on an external device
- Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)

Help Guide

IC Recorder ICD-PX370

Recording the playback audio of the IC recorder on an external device

You can connect an external device to your IC recorder and record playback audio from the IC recorder. Before you start recording, we recommend you make a trial recording first.

- Connect one end of an audio connection cable to the () (headphones) jack on the IC recorder and the other end to the external input jack on the external device.
- Press ➤ on the IC recorder and the record button on the external device simultaneously to start playback on the IC recorder and recording on the external device.

The playback audio from the IC recorder is recorded on the external device.

3 Press ■ STOP on the IC recorder and the stop button on the external device.

Hint


When connecting an external device to your IC recorder, use an audio connecting cable without resistance.

Help Guide

IC Recorder ICD-PX370

Playing a file

You can select a file from the HOME menu for playback.



- 1 Select " ☐ Music" or " ☐ Recorded Files" on the HOME menu, and then press ►.
- 2 Search and select a file.

For instructions on searching a file, see Selecting a file.

3 Press ►.

Playback starts.

4 Press VOL -/+ to adjust the playback volume.

Note

For the customers in Europe only:When you try to adjust the volume to a level that exceeds the specified level, the "Check The Volume Level" message appears.

Hint

- To stop playback, press STOP.
- When you stop recording and the recording standby screen is on the display window, you can press to play the file you have just recorded.

Related Topic

- Additional operations available during playback
- Playing music files on the IC recorder that were copied from a computer

Help Guide

IC Recorder ICD-PX370

Selecting a file
You can select a file from the HOME menu for playback or editing.
1 Select " ∫ Music" or " Recorded Files" on the HOME menu, and then press ►.
Select a file search category.
Press ▲ or ▼ to select one of the following file search categories, and then press ►. ☐ Music: "All Songs," "Albums," "Artists," and "Folders" ☐ Recorded Files: "Latest Recording," "Search by REC Date," "Search by REC Scene," and "Folders" Recorded Files ☐ Latest Recording ☐ Search by REC Dat ☐ Search by REC Scene ☐ Folders Selecting "Folders" as the file search category displays the Memory Selection screen. Select either "Built-In Memory" or "SD Card" as the memory storage. If you insert the microSD card that has previously been used in another IC recorder, "SD Card(Other Models)" may appear in addition to "SD Card."
3 Select a list or folder from the search results, and then select a file.
Press ▲ or ▼ to select a list or folder, and then select the file.
Hint By default, your IC recorder has the "FOLDER01" folder created under " Recorded Files."
4-595-551-11(2) Copyright 2016 Sony Corporation

Help Guide

IC Recorder ICD-PX370

Additional operations available during playback

You can perform the following operations while playback is in progress .

To stop at the current position

Press ■ STOP.

To resume playback from that point, press ▶.

To go back to the beginning of the current file

Press ◄ once.

If track marks are added and the Easy Search function is turned off, the previous track mark point toward the beginning of the file is located.

To go back to previous files

To skip to the next file

Press ▶▶ once.

If track marks are added and the Easy Search function is turned off, the next track mark point toward the end of the file is located.

To skip to the succeeding files

Press ▶ repeatedly.

Related Topic

- Adding a track mark
- Locating the desired playback point quickly (Easy Search)

Help Guide

IC Recorder ICD-PX370

Reducing noise in the playback audio to make human voices sound clearer – the Clear Voice function

The Clear Voice function reduces ambient noises to make human voices distinctive. You will hear human voices more clearly in the playback audio.



While playback is on standby or in progress, select "Clear Voice" on the OPTION menu, and then press ▶.



Press ▲ or ▼ to select "Clear Voice 1" or "Clear Voice 2," and then press ►.

Description of menu items

You can select one of the following items:

OFF:

Turns off the Clear Voice function (default setting).

Clear Voice 1

Reduces ambient noises and adjust loudness of human voices to the optimum level to make human voices sound more clearly.

Clear Voice 2:

Reduces ambient noises further than "Clear Voice 1" to make human voices sound much more clearly.

Note

While playback with the built-in speaker or playback of the files in "J Music" is in progress, the Clear Voice function does not work.

Help Guide

IC Recorder ICD-PX370

Using the transcription playback mode


In the transcription playback mode, you can fast-forward or fast-rewind to search for a particular point as well as use the DPC (Digital Pitch Control) function to slow down the playback speed. This is useful when you want to transcribe a recorded file of a meeting, etc.



While playback is on standby, select "Transcription Playback Mode" on the OPTION menu, and then press



Press ► to start playback.



You can use the following functions while your IC recorder is in the transcription playback mode.

- DPC: You can change the playback speed to help you understand what you are listening more easily. Press ▲
 DPC (Digital Pitch Control) to display the DPC setting screen.
 - Press ◄◄/▶▶ to adjust the playback speed, press ▲ or ▼ to select "ON," and then press ▶.
- Easy Search: You can quickly search the file for the desired point by pressing |
- Cue/Review: You can search the file for the desired point by pressing and holding ◄◄/▶▶.

Note

- When your IC recorder is placed in the transcription playback mode, you cannot:
 - use the playback mode.
 - turn on the A-B repeat playback function.
 - turn on the button-hold repeat playback function.

Hint

- To stop playback, press STOP.
- To exit the transcription playback mode, select "End Transcription Playback Mode" on the OPTION menu while your IC recorder is in the transcription playback mode or playback is on standby.
- To listen to other files, press BACK/HOME to display the file list, and then select a file.

Related Topic

- Adjusting the playback speed the DPC (Digital Pitch Control) function
- Locating the desired playback point quickly (Easy Search)


Help Guide

IC Recorder ICD-PX370

Adjusting the playback speed – the DPC (Digital Pitch Control) function


You can adjust the playback speed in a range from 0.25 times to 3.00 times. Changing the playback speed does not affect the playback audio. Files will play in natural tones, thanks to digital processing.

You can also change the playback speed while your IC recorder is in the "Transcription Playback Mode."



Mhile playback is on standby or in progress, press ▲ DPC (Digital Pitch Control).

The DPC setting screen is displayed.



PressI
✓ or ➤► Ito adjust the playback speed.

The speed decreases by 0.05 times (from x 0.25 to x 1.00).

The speed increases by 0.10 times (from x 1.00 to x 3.00).

When you press and hold either button, you can change the speed continuously.

The playback speed is set to "x 1.00" by default.

- 3 Press ▲ or ▼ to select "ON."
- Press ➤ to set the playback speed.

Hint

To resume the normal playback speed, select "OFF" in step 3.

Related Topic

Using the transcription playback mode

Help Guide

IC Recorder ICD-PX370

Selecting the playback mode

You can select the playback mode that suits your needs.





2 Press ▲ or ▼ to select a playback mode, and then press ►.

Description of menu items

You can select one of the following items:

Normal:

Plays the files in the specified range one by one.

Repeat:

Plays the files in the specified range repeatedly.

1 1 File Play:

Plays the current file to the end and stops.

1 1 File Repeat:

Plays the current file repeatedly.

Shuffle:

Plays the files in the specified range at random.

Shuffle Repeat:

Plays the files in the specified range repeatedly at random.

Related Topic


- Specifying a segment of a file to play repeatedly (A-B repeat)
- Continually playing the current file (Button-hold repeat playback)

Help Guide

IC Recorder ICD-PX370

Specifying a segment of a file to play repeatedly (A-B repeat)

You can specify the starting point A and the finishing point B in a file to play the segment between the specified points repeatedly.



While playback is on standby or in progress, press ▼ ¬A-B to specify the starting point A.

"A-B B?" is displayed.

Press ▼ ←A-B again to specify the finishing point B.

" A-B" is displayed and the specified segment plays repeatedly.

Note

- If you specify the starting point A and then specify the same point as the finishing point B while playback is on standby, the specified starting point A will be cancelled.
- You cannot turn on the button-hold repeat playback function while the A-B repeat playback function is active.

Hint

- To turn off the A-B repeat playback function and resume the normal playback, press ▼ ¬A-B again.
- To change the segment specified for the A-B repeat playback function, resume the normal playback and then repeat steps 1 and 2 once again.

Related Topic

- Selecting the playback mode
- Continually playing the current file (Button-hold repeat playback)

Help Guide

IC Recorder ICD-PX370

Continually playing the current file (Button-hold repeat playback)

You can repeat playback of the file you are currently playing with a simple operation.



appears on the playback screen and the current file plays repeatedly.

Note

You cannot turn on the button-hold repeat playback function while the A-B repeat playback function is active.

Hint

- To turn off the button-hold repeat playback function and resume the normal playback, press ➤ or STOP.
- You can turn on the button-hold repeat playback function while your IC recorder is in a particular playback mode.

Related Topic

Specifying a segment of a file to play repeatedly (A-B repeat)

Help Guide

IC Recorder ICD-PX370

Specifying the playback range in the stored file list

ou can specify the playback range in the playback file list. The contents in the playback range vary depending on the elected file search category for the recorded files or music.
Select "☐ Recorded Files" or "♬ Music" on the HOME menu, and then press ►.
Press ▲ or ▼ to select a file search category, and then press ►.
Select a file you want to play, and then press ►.
While playback is on standby or in progress, select "Playback Range" on the OPTION menu, and then press ►.
Transcription Pla Clear Voice Easy Search Play Mode Playback Range Delete a File
Press ▲ or ▼ select "All Range" or "Selected Range," and then press ►.
Descriptions of menu items
ou can select one of the following items:
Il Range: lays all files that belong to the file search category you selected for " Recorded Files" or " Music." Selected Range: lays all files that are contained in the folder (recording date, recording scene, artist name, album title, etc.), including
iays an mes that are contained in the loudi (recording date, recording scene, artist hame, abditt the, etc.), including

Related Topic

Selecting a file

the current playing file.


4-595-551-11(2) Copyright 2016 Sony Corporation

Selecting " Care Selected Range" displays the folder icon on the playback screen.

Help Guide

IC Recorder ICD-PX370

Listening to sound with better quality




- Use headphones:
 Connect headphones (not supplied) to the (headphones) jack. This disables the built-in speaker.
- Use external speakers: Connect active speakers (not supplied) to the \(\hat{\cap}\) (headphones) jack.

Help Guide

IC Recorder ICD-PX370

Searching forward/backward (Cue/Review)



- To search forward (Cue): While playback is on standby or in progress, press and hold ▶ land release it at the point you want to resume playback.
- To search backward (Review):
 While playback is on standby or in progress, press and hold

 ✓ and release it at the point you want to resume playback.

Forward or backward search begins at a slow speed, which helps you check the file word by word. If you keep holding either button, forward or backward search will continue at a faster speed.

Related Topic

Locating the desired playback point quickly (Easy Search)

Help Guide

IC Recorder ICD-PX370

Locating the desired playback point quickly (Easy Search)

The Easy Search function helps you quickly locate the point from which you want to play.

While playback is on standby or in progress, select "Easy Search" on the OPTION menu, and then press ►



Press ▲ or ▼ to select "ON," and then press ►.

Description of menu items

You can select one of the following items:

ON:

Turns on the Easy Search function. While playback is in progress, pressing ▶▶ fast-forwards by 10 seconds and pressing ▶▶ fast-rewinds by 3 seconds.

OFF:

Turns off the Easy Search function (default setting).

Help Guide

IC Recorder ICD-PX370

Deleting a file

You can select a file and delete it.

Note

- Once you have deleted a file, you will not be able to restore it.
- Select a file you want to delete.
- **2** Select "Delete a File" on the OPTION menu, and then press ▶.



"Delete?" appears and the specified file plays for confirmation.

Press ▲ or ▼ to select "Yes," and then press ►.



The "Please Wait" message appears on the display window and the selected file will be deleted.

Note

You cannot delete a protected file. To delete a protected file, remove protection from the file first, then delete the file. For instructions on protecting a file, see Protecting a file.

Hint

- To cancel the deleting process, select "No" in step 3, and then press ➤.
- To delete a part of a file, first divide the file into two files, select the file you want to delete, and proceed with step 2 and step 3. For instructions on dividing a file, see Dividing a file at the current playback point.

Related Topic

- Selecting a file
- Deleting all files in the searched folder or list

Deleting a folder

Help Guide

IC Recorder ICD-PX370

Deleting all files in the searched folder or list

- Press ▲ or ▼ to select a file search category, and then press ►.
- Press ▲ or ▼ to select the folder or list containing the files you want to delete, and then press ►.
- Select "Delete All Files" or "Delete All in List" on the OPTION menu, and then press ►.



"Delete All Files in This Folder?" or "Delete All Files in This List?" appears on the display window.

5 Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears on the display window and all files in the selected folder or list will be deleted.

Note

You cannot delete a protected file. To delete a protected file, remove protection from the file first, then delete the file. For instructions on protecting a file, see Protecting a file.

Hint

■ To cancel the deleting process, select "No" in step 5, and then press .

Related Topic

- Deleting a file
- Deleting a folder

Help Guide

IC Recorder ICD-PX370

Deleting a folder

You can select a folder and delete it.

- Press ▲ or ▼ to select "Folders" and the memory storage, and then press ►.
- Press ▲ or ▼ to select the desired folder.
- Select "Delete Folder" on the OPTION menu, and then press ➤.



"Delete Folder?" appears on the display window.

5 Press ▲ or ▼ to select "Yes," and then press ►.

The selected folder is deleted.

If the selected folder contains files, "Delete All Files in This Folder?" appears. Press ▲ or ▼ to select "Yes," and then press ► to delete the folder and its files. If the selected folder contains sub-folders, however, you cannot delete the sub-folders and their files.

Note

• If the selected folder contains protected files, an attempt to delete the folder only deletes unprotected files, leaving the folder and the protected files undeleted. Remove protection from such files first, then delete the folder. For instructions on protecting a file, see Protecting a file.

Hint

- To cancel the deleting process, select "No" in step 5, and then press ➤.
- If you delete the current file storage destination folder, "Switch Recording Folder" appears on the display window and "FOLDER01" (default destination folder) is assigned as the new file storage destination folder.
- If you delete all of the file storage destination folders, "No Folders Creating New Recording Folder" appears on the display window and "FOLDER01" is automatically created.

Related Topic

Deleting a file

 Deleting all files in the 	ne sear	cnea i	older	or II	st
---	---------	--------	-------	-------	----

Help Guide

IC Recorder ICD-PX370

Moving a file to a different folder

You can select a file and move it to another folder.

- 1 Select the file you want to move.
- While playback is on standby, select "Move/Copy File" on the OPTION menu, and then press ▶.



- Press ▲ or ▼ to select "Move to Built-In Memory" or "Move to SD Card," and then press ►.
- Press ▲ or ▼ to select the destination folder, and then press ►.



The "Please Wait" message appears and the file will be moved from the source folder to the destination folder.

Note

- You cannot move a protected file. To move the file, remove the protection first, and then move the file. For instructions on removing protection, see Protecting a file.
- You cannot move music files.

Related Topic

- Selecting a file
- Copying a file to a different folder

Help Guide

IC Recorder ICD-PX370

Copying a file to a different folder

You can select a file and copy it to another folder, which is useful in making a backup copy.

- Select the file you want to copy.
- While playback is on standby, select "Move/Copy File" on the OPTION menu, and then press ►.



- 3 Press ▲ or ▼ to select "Copy to Built-In Memory" or "Copy to SD Card," and then press ▶.
- Press ▲ or ▼ to select the destination folder, and then press ▶.

The "Please Wait" message appears and the file will be copied from the source folder to the destination folder with the same name.

Note

- You cannot copy a protected file. To copy the file, you must remove the protection first. For instructions on removing protection, see Protecting a file.
- You cannot copy music files.

Related Topic

- Selecting a file
- Moving a file to a different folder

Help Guide

IC Recorder ICD-PX370

Creating a folder

Recorded files are stored in "FOLDER01" under " Recorded Files" by default. You can create a new folder and change this default folder to it.

Select "♣ Settings" - "Recording Settings" - "Create Folder" from the HOME menu, and then press ►.



- Select "Built-In Memory" or "SD Card" on the Memory Selection screen, and then press ►.
- Select ▲ or ▼ to select a folder name from the template, and then press ►.

A new folder is created.

Note


You cannot create a folder in " Music."

Help Guide

IC Recorder ICD-PX370

Adding a track mark

You can add a track mark at a point where you want to divide a file later or you want to locate during playback. You can add a maximum of 98 track marks to a single file.



While recording is in progress or paused, or while playback is in progress or on standby, press T-MARK at the point you want to add a track mark.

The (track mark) indicator flashes three times, and a track mark is added.



Note

You cannot add track marks to a protected file. To add track marks to a protected file, remove protection from the file first, then add track marks. For instructions on protecting a file, see Protecting a file.

Hint

- To locate a track mark and start playback at the track mark, pressI◄◄or►►I while playback is on standby or in progress. While playback is on standby, wait for the I♥ (Track mark) indicator to flash once, and then press ► to start playback.
- You can add track marks while your IC recorder is in the transcription playback mode.
- With the HOME menu on the display window, you can still add a track mark by pressing T-MARK while:
 - recording is in progress or paused.
 - playback is in progress or on standby.

Related Topic

- Adding track marks automatically
- Deleting a track mark

Help Guide

IC Recorder ICD-PX370

Adding track marks automatically

You can add track marks automatically at specified intervals while you are recording.

Select " Settings" - "Recording Settings" - "Auto Track Marks" from the HOME menu, and then press



- 2 Press ▲ or ▼ to select "Interval," and then press ►.
- 3 Press ▲ or ▼ to select the interval length and then press ►.

You can select from "5min," "10min," "15min," or "30min." The Auto Track Marks function is turned on.

4 Press and hold BACK/HOME to return to the HOME menu.

Hint

- To cancel the Auto Track Marks function setup process, select "OFF" in step 2.
- While the Auto Track Marks function is turned on, you can still press T-MARK during recording to add a track mark at any point.

Related Topic

- Adding a track mark
- Deleting a track mark

Help Guide

IC Recorder ICD-PX370

Deleting a track mark

You can delete the closest track mark before the point where you stopped playback.


- 1 Select the file from which you want to delete track marks.
- 2 Play the file and stop at a point after the track mark you want to delete.
- 3 Select "Delete Track Marks" "This Track Mark" from the OPTION menu, and then press ▶.



"Delete Track Mark?" appears on the display window.

Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears in the display window and the selected track mark will be deleted.



- A. Before deleting a track mark: indicates the point where you stopped playback.
- B. After deleting a track mark: The closest track mark before the point where you stopped playback will be deleted.

Note

- You cannot delete track marks from a protected file. To delete track marks from a protected file, remove protection from the file first, then delete the track marks. For instructions on protecting a file, see Protecting a file.
- While recording is on standby, you cannot delete track marks with the OPTION menu. Use the HOME menu to select the file containing the track mark that you want to delete.

Hint

■ To cancel the deleting process, select "No" in step 4, and then press ➤.

Related Topic

Selecting a file

4-595-551-11(2) Copyright 2016 Sony Corporation

Deleting all the track marks in the selected file at one time

Help Guide

IC Recorder ICD-PX370

Deleting all the track marks in the selected file at one time

You can delete all the track marks of the selected file.

- Select the file from which you want to delete the track marks.
- Select "Delete Track Marks" "All Track Marks" from the OPTION menu, and then press ►.



"Delete All Track Marks?" appears on the display window.

3 Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears and all the track marks will be deleted at one time.

Note

- You cannot delete track marks from a protected file. To delete track marks from a protected file, remove protection from the file first, then delete the track marks. For instructions on protecting a file, see Protecting a file.
- You cannot delete track marks while recording is on standby. Use the HOME menu to select the file containing the track mark that you want to delete.

Hint

■ To cancel the deleing process, select "No" in step 3, and then press ➤ .

Related Topic

- Selecting a file
- Deleting a track mark

Help Guide

IC Recorder ICD-PX370

Dividing a file at the current playback point

You can divide a single file into two files. Dividing a file helps you quickly locate the point from which you want to play in a long recording file, such as a meeting recording. You can further divide either of the divided files.

- Select the file that you want to divide, and then play the file and stop at a point where you want to divide the file.
- **2** Select "Divide" "Current Position" from the OPTION menu, and then press ▶.



"Divide at Current Stop Position?" appears on the display window.

3 Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears, and the divided files will be suffixed with a sequential number ("_01" for the first part, and "_02" for the second part).

Α	File 1	File 2		File 3	
		•	\		
В	File 1	File 2_01	File 2_02	File 3	

- A. Before dividing a file: ▲ indicates where you divided the file.
- B. After dividing a file: A suffix made up of a sequential number is added to the file name of the divided files.

Note

You cannot divide a protected file. To divide a protected file, remove protection from the file first, then divide the file. For instructions on protecting a file, see Protecting a file.

Hint

■ To cancel the dividing process, select "No" in step 3, and then press ➤

Related Topic

- Selecting a file
- Dividing a file at all the track mark points

Help Guide

IC Recorder ICD-PX370

Dividing a file at all the track mark points

You can divide a file at all the track mark points.


- Select the file that you want to divide, and then play the file and stop at any point.
- While playback is on standby, select "Divide" "At All Track Marks" from the OPTION menu, and then press



"Divide at All Track Marks?" appears on the display window.

3 Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears and the file will be divided at all the track mark points, deleting all the track marks. The divided files will be suffixed with a sequential number ("_01," "_02," and so on).



- A. Before dividing a file: mindicates a track mark point.
- B. After erasing track marks: A file is divided at all the track mark points, and the divided files will be suffixed with a sequential number ("_01," "_02," and so on).

Note

- You cannot divide a protected file. To divide a protected file, remove protection from the file first, then divide the file. For instructions on protecting a file, see Protecting a file.
- Track marks located near the beginning and end of the source file may not be used for dividing and remain in the divided files.

Hint

■ To cancel the dividing process, select "No" in step 3, and then press .

Related Topic

- Selecting a file
- Dividing a file at the current playback point

Help Guide

IC Recorder ICD-PX370

Protecting a file

To prevent a file from being accidentally deleted or edited, you can protect an important file. A protected file is marked with the (protect) indicator and is regarded as a read-only file that you cannot delete or edit.

- 1 Select the file that you want to protect.
- While playback is on standby, select "Protect" on the OPTION menu, and then press ►.



"Protected" appears on the display window and the file is protected. When you play the protected file, the forcetet) indicator appears on the playback screen.

Hint

■ To remove protection from a file, select the protected file, and then select "Do Not Protect" in step 2.

Related Topic

Selecting a file

Help Guide

IC Recorder ICD-PX370

List of the Settings menu items

The following lists the Settings menu items on the HOME menu.

Recording Settings

Recording Folder:
 Changing the file storage destination folder

Create Folder: Creating a folder

Scene Select:

Selecting a recording scene for an individual situation

REC Mode:

Selecting the recording mode (REC Mode)

Built-In Mic Sensitivity:

Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity)

Ext. Input Setting:

Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)

Recording Filter:

Reducing noise during recording (Recording Filter)

- VOR

Recording automatically in response to the input sound volume – the VOR function

Auto Track Marks:

Adding track marks automatically

Playback Settings

Clear Voice:

Reducing noise in the playback audio to make human voices sound clearer - the Clear Voice function

Easy Search:

Locating the desired playback point quickly (Easy Search)

Play Mode:

Selecting the playback mode

Playback Range:

Specifying the playback range in the stored file list

Common Settings

LED:

Turning the operation indicator on or off (LED)

Beep:

Turning the beep sound on or off (Beep)

Language:Selecting the display language (Language)

Date&Time:

Setting the clock (Date&Time)

Time Display:

Selecting the clock display format (Time Display)

Date Display Format:

Selecting the date display format (Date Display Format)

Auto Power Off:

Setting the time period before the IC recorder automatically turns off (Auto Power Off)

Reset/Format:

Resetting all menu settings to the default ones (Reset All Settings) Formatting the memory (Format Built-In Memory/Format SD Card)

Available Rec. Time:

Checking the remaining recording time (Available Rec. Time)

System Information:

Checking the information about the IC recorder (System Information)

Related Topic

Using the HOME menu

Help Guide

IC Recorder ICD-PX370

Selecting the recording mode (REC Mode)

You can set the recording mode for audio recordings. Set this menu item before you start recording.

Select " ♣ Settings" - "Recording Settings" - "REC Mode" from the HOME menu, and then press ►.



- **2** Select the desired recording mode, and then press **►**.
- 3 Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

MP3 192kbps:

MP3 (compressed) in stereo standard-quality recording mode (default setting)

MP3 128kbps:

MP3 (compressed) in long play stereo recording mode

MP3 48kbps(MONO):

MP3 (compressed) in monaural standard recording mode

Help Guide

IC Recorder ICD-PX370

Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity)

You can select the sensitivity level of the built-in microphone. Set this menu item before you start recording.





- 2 Press ▲ or ▼ to select the desired level of the microphone sensitivity, and then press ►.
- 3 Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

- Auto: An appropriate sensitivity level is automatically selected according to the input human voices (default setting).
- High: Suitable for recording distant or soft human voices in large spaces, including conference rooms.
- Medium: Suitable for recording small meetings or interviews.
- Low: Suitable for speaking into the built-in microphone to record voice notes or recording nearby or loud human voices.

Note

While recording audio from an external device is in progress, the Built-In Mic Sensitivity function is turned off.

Related Topic

Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)

Help Guide

IC Recorder ICD-PX370

Reducing noise during recording (Recording Filter)

With the Recording Filter function, you can reduce noise in the recordings.





Press ▲ or ▼ to select "NCF(Noise Cut)" or "LCF(Low Cut)," and then press ▶.



3 Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

OFF:

Turns off the Recording Filter function.

NCF(Noise Cut):

Cuts high-frequency sounds except for human voices as well as low-frequency sounds.

LCF(Low Cut):

Cuts low-frequency sounds, including noise from projectors and roaring wind sounds (default setting).

Note

While "Audio IN" is selected for "Ext. Input Setting" is in progress, the Recording Filter function does not work.

Hint

To cancel the Recording Filter function setup process, select "OFF" in step 2.

Related Topic


Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)

Help Guide

IC Recorder ICD-PX370

Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting)

You can select the audio input type ("MIC IN" or "Audio IN") of the \P (microphone) jack and the sensitivity level of the external microphone.





If an external microphone is not connected to the \P (microphone) jack, "Only Activated When External Input Used" appears.

- Press ▲ or ▼ to select the desired audio input type, and then press ▶.
 - To select the audio input type and leave the sensitivity level of the external microphone as it is: Select "MIC IN" or "Audio IN."

MIC IN: Select this audio input type when an external microphone is connected to the \(\bigcirc\) (microphone) jack. Audio IN: Select this audio input type when an external device other than a microphone is connected to the \(\bigcirc\) (microphone) jack.

When you are finished with the selection, press ►. Pressing ► switches the audio input type and displays the Recording Settings menu. Proceed to step 5.

- To select the audio input type and the sensitivity level of the external microphone:
 Select "Sensitivity setting" under "MIC IN," and then press ►. Pressing ► displays the Sensitivity setting screen.
 Proceed to step 3.
- 3 Press ▲ or ▼ to select the desired sensitivity level, and then press ►.
- Press and hold BACK/HOME to return to the HOME menu.

 To return to the screen before you displayed the HOME menu, press STOP.

Description of menu items on the Sensitivity setting screen

You can select one of the following items:

- Auto: An appropriate sensitivity level is automatically selected according to the input human voices (default setting).
- High: Suitable for recording distant or soft human voices in large spaces, including conference rooms.
- Medium: Suitable for recording small meetings or interviews.
- Low: Suitable for speaking into the built-in microphone to record voice notes or recording nearby or loud human voices.

Hint

4-595-551-11(2) Copyright 2016 Sony Corporation

• The recording volume level may vary depending on the external microphone. Check on the recording level guide and change the

microphone sensitivity level.


Help Guide

IC Recorder ICD-PX370

Turning the operation indicator on or off (LED)

You can set the operation indicator to turn on or off during IC recorder operations.

Select " ♣ Settings" - "Common Settings" - "LED" from the HOME menu, and then press ►.



- 2 Press ▲ or ▼ to select "ON" or "OFF," and then press ►.
- 3 Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

ON:

The operation indicator lights or flashes according to IC recorder operations (default setting).

OFF:

The operation indicator stays unlit during IC recorder operations.


Help Guide

IC Recorder ICD-PX370

Selecting the display language (Language)

You can select the language to be used for messages, menus, folder names, etc.

Select " ♣ Settings" - "Common Settings" - "Language" from the HOME menu and then press ►.



Press ▲ or ▼ to select the language that you want to use, and then press ►.

You can select the language from Deutsch (German), English, Español (Spanish), Français (French), Italiano (Italian), Русский (Russian), Türkçe (Turkish), 한국어 (Korean), 简体中文 (Simplified Chinese), 繁體中文 (Traditional Chinese).

Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Note

The number of language options you can select and the default setting differ depending on the country or region of your purchase.

Help Guide

IC Recorder ICD-PX370

Setting the clock (Date&Time)

You can set the clock of your IC recorder. Be sure to set it before you start recording.



Set the current date and time.



Press \blacktriangle or \blacktriangledown to set an item, and then press \blacktriangleright .

Repeat the actions to set all items.

To move the focus backward or forward, press I◄◄or▶►. You can also press BACK/HOME to move the focus to the previous item.

When you are finished with the last item, press ▶ to apply the settings to the clock.

Press and hold BACK/HOME to return to the HOME menu.

To display the current time, place your IC recorder into the HOLD state.

Note

- Once you have removed the batteries from the compartment and inserted them back in or you have replaced the batteries with new ones, the Set Date/Time screen appears on the display widow. On this screen, you see the date and time of the last operation you made with your IC recorder before you removed the batteries. Be sure to change the date and time to the current ones.
- The clock may tell the time either in 12-Hour format with "AM" or "PM" or in the 24-Hour format, depending on the selected clock display format (Time Display) on the Settings menu. In addition, the default clock display format depends on the country or region of your purchase.
- The default date display format depends on the country or region of your purchase.

Related Topic

Placing the IC recorder into the HOLD state (HOLD)

Help Guide

IC Recorder ICD-PX370

Selecting the date display format (Date Display Format)

You can select the date display format to suit your preference.

Select "♣ Settings" - "Common Settings" - "Date&Time" - "Date Display Format" from the HOME menu, and then press ►.



- Press ▲ or ▼ to select the desired format, and then press ►.
- Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

YYYY/MM/DD:

The date appears in the year/month/date format.

MM/DD/YYYY:

The date appears in the month/date/year format.

DD/MM/YYYY:

The date appears in the date/month/year format.

Note

The default setting differs depending on the area you purchased your IC recorder.


Help Guide

IC Recorder ICD-PX370

Selecting the clock display format (Time Display)

You can select either the 12-Hour or 24-Hour format.





- Press ▲ or ▼ to select the desired format, and then press ►.
- Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

12-Hour:

12:00AM = midnight, 12:00PM = noon

24-Hour:

00:00 = midnight, 12:00 = noon

Note


The default setting differs depending on the country or region of your purchase.


Help Guide

IC Recorder ICD-PX370

Turning the beep sound on or off (Beep)

You can turn the operation beep sound on or off.





- Press ▲ or ▼ to select "ON" or "OFF," and then press ►.
- Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Description of menu items

You can select one of the following items:

ON:

A beep will sound to indicate that an operation is accepted or an error occurs (default setting).

OFF:


No beeps will sound.

IC Recorder ICD-PX370

Setting the time period before the IC recorder automatically turns off (Auto Power Off)

You can set your IC recorder to automatically turn off if it is left unused for the specified period time.

1 Select " ♣ Settings" - "Common Settings" - "Auto Power Off" from the HOME menu, and then press ▶.



- Press ▲ or ▼ to select the desired time period, and then press ►.
- Press and hold BACK/HOME to return to the HOME menu.

 To return to the screen before you displayed the HOME menu, press STOP.

Description of menu items

You can select one of the following items:

OFF:

Your IC recorder will not turn off automatically.

5min:

Your IC recorder will turn off in approx. 5 minutes.

10min:

Your IC recorder will turn off in approx. 10 minutes (default setting).

30min

Your IC recorder will turn off in approx. 30 minutes.

60min

Your IC recorder will turn off in approx. 60 minutes.


Help Guide

IC Recorder ICD-PX370

Resetting all menu settings to the default ones (Reset All Settings)

You can reset all menu settings to the default ones except for the following:

- Clock settings (Date&Time)
- Display language settings (Language)
- While recording or playback is on standby, select " Settings" "Common Settings" "Reset/Format" "Reset All Settings" from the HOME menu, and then press ►.



"Default Value?" appears on the display window.

Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears and all menu settings will be reset to the default ones.

Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Hint


To cancel the resetting process, select "No" in step 2.

Help Guide

IC Recorder ICD-PX370

Formatting the memory (Format Built-In Memory/Format SD Card)

You can format either the built-in memory of your IC card or the microSD card. Formatting the built-in memory will delete all of the stored data and restore the original folder structure at your purchase.



"Delete All Data?" appears.

Press ▲ or ▼ to select "Yes," and then press ►.

The "Please Wait" message appears and the selected memory will be formatted.

3 Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.

Note

- Be sure to use your IC recorder, not a computer, to format the microSD card that you intend to use on the IC recorder.
- Be aware that formatting the built-in memory will delete all of the stored data, including protected files and Sound Organizer 2, and you will not be able to restore anything after the formatting process.

Hint

To cancel the formatting process, select "No" in step 2.

Help Guide

IC Recorder ICD-PX370

Checking the remaining recording time (Available Rec. Time)

You can display the remaining recording time in hours, minutes, and seconds.

Select " Settings" - "Common Settings" - "Available Rec. Time" from the HOME menu, and then press



2 Press and hold BACK/HOME to return to the HOME menu.


To return to the screen before you displayed the HOME menu, press ■ STOP.

Help Guide

IC Recorder ICD-PX370

Checking the information about the IC recorder (System Information)

You can display the information about your IC recorder, such as the IC recorder's model name and the software version number.





2 Press and hold BACK/HOME to return to the HOME menu.

To return to the screen before you displayed the HOME menu, press ■ STOP.


Help Guide

IC Recorder ICD-PX370

Connecting the IC recorder to a computer

To exchange files between your IC recorder and a computer, connect the IC recorder to the computer.

Press and hold the USB slide lever on the back of the IC recorder, and then slide it in the direction of the arrow to push out the USB connector. Insert the connector into the USB port on a computer that is up and running.



- 2 Make sure the IC recorder is successfully detected by the computer.
 - On the Windows computer, open "Computer" or "PC," and make sure that "IC RECORDER" or "MEMORY CARD" is detected.
 - On the Mac, make sure that an "IC RECORDER" or "MEMORY CARD" drive appears on the Finder.

The IC recorder is detected by the computer as soon as a connection is made. While the IC recorder is connected to the computer, "Connecting" appears on the display window of the IC recorder.

Related Topic

Disconnecting the IC recorder from the computer

Help Guide

IC Recorder ICD-PX370

Disconnecting the IC recorder from the computer

Be sure to follow the procedure below, otherwise you may not be able to play the files stored on your IC recorder due to data corruption.



2 Perform the following operation on the computer.


• On the Windows taskbar at the bottom right of the desktop, click the following icon.



Then, click "Eject IC RECORDER." The icon and menu displayed can be different on different operating systems. The icon may not be always displayed on the taskbar depending on your computer settings.

• On the Mac screen, click the removal icon of the "IC RECORDER" that appears on the sidebar of the Finder.

Disconnect the IC recorder from the USB port on the computer. Press and hold the USB slide lever, and then slide it in the direction of the arrow to retract the USB connector.



Hint

For details on disconnecting a USB device from the computer, refer to the operating instructions supplied with the computer.

Related Topic

Connecting the IC recorder to a computer


Help Guide

IC Recorder ICD-PX370

Structure of folders and files

You can use a computer to view the structure of folders and files on the built-in memory of your IC recorder or the microSD card. Connect the IC recorder to the computer and use the Explorer (Windows) or the Finder (Mac) to open "IC RECORDER" or "MEMORY CARD." The following illustrates the structure of folders and files:

Built-in memory

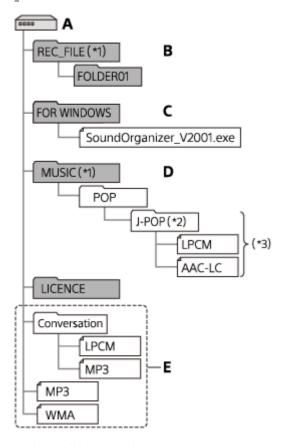


- A: IC RECORDER folder
- B: Folder for storing files recorded with your IC recorder
- C: Folder containing the Sound Organizer 2 installer file
- D: Folder for storing files transferred from the computer
- E: Your IC recorder is not capable of detecting any folders and files stored at these folder structure levels.
- *1 Files stored in the REC_FILE folder appear in " Recorded Files" while those in the MUSIC folder appear in " Music." When transferring a file, make sure you put it either in the REC_FILE folder or in the MUSIC folder.
- *2 The folder containing music files will appear with the same name on your IC recorder. It would help you identify folders if you name the folders with easy-to-remember names. The folder names shown in the above illustration are just examples.
- *3 Your IC recorder is capable of detecting up to 8 levels of the transferred music folders.

Hint

- Before transferring music files from the computer to your IC recorder, it would be helpful if you registered the music file information, such as titles and artist names, on the computer in advance. Then, you can display the music file information or use it for music file search on the IC recorder.
- If a music file has no title assigned, it will appear with its file name on your IC recorder.

microSD card

The microSD card has a different structure of folders and file from the built-in memory of your IC recorder.

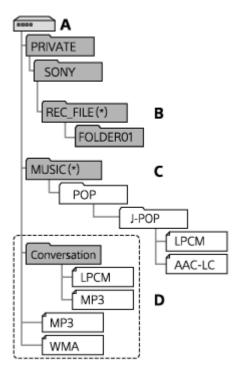

A: microSD card

- B: Folder for storing files recorded with your IC recorder
- C: Folder for storing files transferred from the computer
- D: Your IC recorder is not capable of detecting any folders and files stored at these folder structure levels.
- * Files stored in the REC_FILE folder appear in " Recorded Files" while those in the MUSIC folder appear in " Music." When transferring a file, make sure you put it either in the REC_FILE folder or in the MUSIC folder.

IC Recorder ICD-PX370

Copying files from the IC recorder to a computer


You can copy files and folders from your IC recorder to a computer to store them.



- 1 Connect the IC recorder to the computer.
- Copy files or folders you want to transfer to the computer.
 Drag and drop the files or folders you want to copy from "IC RECORDER" or "MEMORY CARD" to the local disk on the computer.
- Disconnect the IC recorder from the computer.

Hint

■ To copy a file or folder (drag and drop), click and hold the file or folder (①), drag (②), and then drop (③).



- A: IC RECORDER or MEMORY CARD
- B: Computer

Related Topic

- Connecting the IC recorder to a computer
- Disconnecting the IC recorder from the computer

Help Guide

IC Recorder ICD-PX370

Copying music files from a computer to the IC recorder

You can copy music and audio files (MP3(.mp3)) from a computer to your IC recorder by drag and drop.



- 1 Connect the IC recorder to the computer.
- 2 Copy the folder containing music files to the IC recorder.

Open the Explorer (Windows) or the Finder (Mac) and drag and drop the folder containing music files to the REC_FILE folder or the MUSIC folder.

Your IC recorder is capable of storing up to 199 files per folder and up to 5,000 folders and files all together in total per memory.

3 Disconnect the IC recorder from the computer.

Related Topic

- Technical specifications
- Connecting the IC recorder to a computer
- Disconnecting the IC recorder from the computer

Help Guide

IC Recorder ICD-PX370

Playing music files on the IC recorder that were copied from a computer

You	can play the music files that you copied from a computer on your IC recorder.
1	Select " ☐ Recorded Files" or " ☐ Music" on the HOME menu and press ►, and then select a file.
	You can search " Recorded Files" for the files that you copied from a computer to the REC_FILE folder; and " Music" for the files that you copied to the MUSIC folder. For instructions on selecting a file, see Selecting a file.
2	Press ► to start playback.
3	Press ■ STOP to stop playback.

Related Topic

- While playback is in progress
- Technical specifications

Help Guide

IC Recorder ICD-PX370

Using the IC recorder as a USB storage device

You can connect your IC recorder to a computer and use it as a USB storage device.

To use the IC recorder as a USB storage device, you need a computer that meets the system requirements. For more information, see System requirements .

Help Guide


IC Recorder ICD-PX370

What you can do with Sound Organizer 2 (for Windows only)

You can install Sound Organizer 2 using the installer file (SoundOrganizer_V2001.exe) stored on the built-in memory of your IC recorder.

Sound Organizer 2 allows you to exchange files with the IC recorder or a memory card. You can play songs imported from other media (music CDs, etc.) and audio files (MP3 files, etc.) imported from another computer as well as transfer them to the IC recorder. With Sound Organizer 2, a variety of operations are available for the imported files: playback, editing, conversion to audio files, burning music CDs, and attaching audio files to e-mails.

For detailed instructions on using Sound Organizer 2, refer to the Sound Organizer 2 help.

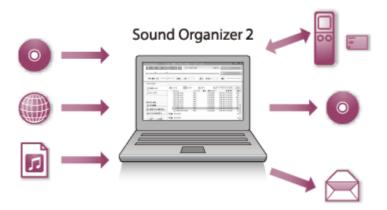

Importing files recorded by the IC recorder

You can import files that you recorded by the IC recorder into Sound Organizer 2. The imported files are saved to the computer.

Importing songs from a music CD

You can import songs from of a music CD into Sound Organizer 2.

The imported songs are saved to the computer.

Importing songs on the computer

You can import music and other files stored on the computer into Sound Organizer 2.

Playing files

You can play files imported on Sound Organizer 2.

Changing the file information

You can change the information about songs (titles, artist names, etc.) displayed in the file list.

Dividing files

You can divide one file into multiple files.

Combining files

You can combine multiple files into one file.

Deleting files from the IC recorder

You can delete files stored on your IC recorder.

When you want increase the remaining free space on the IC recorder or you find unnecessary files on the IC recorder, you can directly delete files from Sound Organizer 2.

Transferring files to the IC recorder

You can transfer music and audio files from Sound Organizer 2 to the built-in memory or the microSD card on your IC recorder and enjoy them on the IC recorder.

Burning a music CD

You can select your favorites from the songs imported into Sound Organizer 2 and make your own original music CD.

Other convenient usage

You can start your e-mail software and attach recorded files to an e-mail.

Related Topic

Installing Sound Organizer 2 (for Windows only)

Help Guide

IC Recorder ICD-PX370

System requirements for Sound Organizer 2

The following lists the system requirements for Sound Organizer 2.

Operating systems

- Windows 10
- Windows 8.1
- Windows 7 Service Pack 1 or higher

Note

One of the above operating systems should be pre-installed at shipment. Upgraded operating systems or multi-boot environments are not supported.

IBM PC/AT or compatible

CPU

Processor of 1.66 GHz or higher

Memory

At least 1 GB (32 bit version)/At least 2 GB (64 bit version)

Free hard disk space

At least 400 MB is required.

Depending on the version of Windows, more than 400 MB may be used.

Also, free space for handling music data is required.

Display settings

Screen resolution: 800 × 600 pixels or higher (1,024 × 768 pixels is recommended.)

Screen color: High Color (16 bit) or higher

USB port

A compatible USB port is required to use devices and media.

Operation via a USB hub is not guaranteed except for models for which operation has been specifically guaranteed.

Optical disc

To create a music CD, you need a CD-R/RW drive.

Help Guide

IC Recorder ICD-PX370

Installing Sound Organizer 2 (for Windows only)

Install Sound Organizer 2 on a computer.


Note

- Be sure to install Sound Organizer 2 on the computer that has already Sound Organizer 1.6 installed as well.
- When installing Sound Organizer 2, log in to an account with administrator privileges.
 Also, if the [User Account Control] window appears, confirm the contents of the window and then click [Yes].
- Installing Sound Organizer 2 adds the Windows Media Format Runtime module. The added Windows Media Format Runtime module will remain if you uninstall Sound Organizer 2. If Windows Media Format Runtime is preinstalled, however, the module may not be installed.
- Uninstalling Sound Organizer 2 does not delete data in the contents storage folders.
- If you have a computer that has multiple Windows operating systems installed, do not install Sound Organizer 2 on each of the operating systems to avoid possible data inconsistencies.
- Connect your IC recorder to the computer.
- **2** Go to the [Start] menu, click [Computer], and then double-click [IC RECORDER] [FOR WINDOWS].



The appearance of the windows on the computer screen varies depending on the version of your operating system. Windows 7 is used as an example in this Help Guide.

3 Double-click [SoundOrganizer_V2001] (or [SoundOrganizer_V2001.exe]).

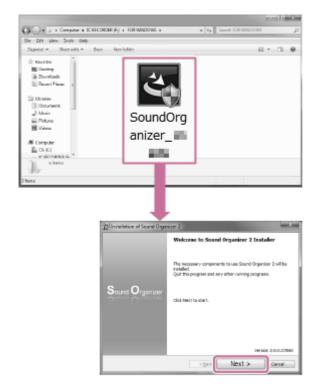

Depending on the version of your operating system, the setup preparation process (file extraction) may start automatically without showing any notice.

In such a case, follow the on-screen instructions.

- Make sure that you accept the terms of the license agreement, select [I accept the terms in the license agreement], and then click [Next].
- When the [Setup Type] window appears, select [Standard] or [Custom], and then click [Next].

If you have selected [Custom], follow the on-screen instructions.

- When the [Ready to Install the Program] screen appears, click [Install].

 Installation starts.
- When [Sound Organizer 2 has been installed successfully.] window appears, check [Launch Sound Organizer 2 Now], and then click [Finish].

Note


You may need to restart the computer after you installed Sound Organizer 2.

Related Topic

Connecting the IC recorder to a computer

IC Recorder ICD-PX370

The Sound Organizer 2 window (for Windows only)



1. Help

Displays the help of Sound Organizer 2. For details on operations, refer to respective help topics.

2. The file list of Sound Organizer 2 (My Library)

Displays a list of files included in My Library of Sound Organizer 2 in accordance with a particular operation.

Recording Files: Displays a list of recording files.

Files that you recorded with your IC recorder appear in this library when they are imported.

Music: Displays a list of music files.

Songs that you imported from music CDs appear in this library.

3. The file list of the IC recorder

Displays the files stored on the connected IC recorder's built-in memory or microSD card.

4. Edit Mode button

Displays the edit area where you can edit a file.

5. Quick Operation Guide button

Displays the Quick Operation Guide to walk you through the basic features of Sound Organizer 2.

6. Sidebar (Import/Transfer)

Import CD: Displays the window for importing the contents of a music CD.

◆■ Burn CD/DVD: Displays the window for burning a disc.

7. Transfer buttons

: Transfers the files from Sound Organizer 2 to the connected IC recorder's built-in memory or microSD card.

: Imports the files from the connected IC recorder's built-in memory or microSD card to My Library of Sound Organizer 2.

Help Guide

IC Recorder ICD-PX370

Compatible memory cards

You can use the following memory cards with your IC recorder.

microSDHC cards (4 GB to 32 GB)

Due to the specifications of your IC recorder, the file size that you can store on the microSD card for playback is limited as follows:

MP3 files: less than 1 GB per file

Note

- Your IC recorder does not support microSDXC cards.
- Successful operations with all types of supported microSD cards are not guaranteed.
- If the microSD card is not detected by your IC recorder, remove it from the slot and then insert it back in.
- Keep any liquid and any metal or flammable object away from the microSD card slot to avoid a fire or shock hazard or malfunctions of your IC recorder.
- Before you start recording with a microSD card, we recommend that you copy all the data stored on the memory card to a computer and format the memory card on your IC recorder so it contains no data.

Related Topic

Formatting the memory (Format Built-In Memory/Format SD Card)

Help Guide

IC Recorder ICD-PX370

System requirements

To connect your IC recorder to a computer or use it as a USB storage device, the computer must meet the following system requirements.

For using Sound Organizer 2 on the computer, see System requirements for Sound Organizer 2.

Operating systems

- Windows 10
- Windows 8.1
- Windows 7 Service Pack 1 or higher
- macOS (v10.11-v10.14)

Note

- One of the above operating systems should be pre-installed at shipment. Upgraded operating systems or multi-boot environments are not supported.
- For the latest information on the supported operating systems, visit our support home page (see Customer support websites).

Hardware requirements

- Port: USB port
- Optical disc drive: To create a music CD, you need a CD-R/RW drive.

Note

The following are not supported:

- Operating systems other than the above
- Any operating system you installed on a homemade computer
- Upgraded operating systems
- Multi-boot environments
- Multi-monitor environments

IC Recorder ICD-PX370

Technical specifications

Specifications

Capacity (User available capacity) (*1) (*2)	4 GB (approx. 3.20 GB = 3,435,973,837 Byte)		
Maximum number of recorded files (for a folder)	199 files		
Maximum number of files	5,000 files (including folders)		
Frequency range	 MP3 192kbps: 50 Hz - 20,000 Hz MP3 128kbps: 50 Hz - 16,000 Hz MP3 48kbps(MONO): 50 Hz - 14,000 Hz 		
Compatible file formats	 MP3 (*3) (*4) Bit rate: 32 kbps - 320 kbps (Supports variable bit rate (VBR)) Sampling frequencies: 16/22.05/24/32/44.1/48 kHz File extension: .mp3 		
Built-in speaker	Approx. 20 mm (0.79 in.) dia.		
Input/Output	 External input jack (minijack, stereo) Input for plug in power, minimum input level 1.0 mV Headphone jack (minijack, stereo) Output for 16 Ω impedance headphones USB connector (Type-A) High-Speed USB compatible Card slot microSD memory card slot 		
Playback speed control (DPC)	3.00 times - 0.25 times: MP3		
Power output	300 mW		
Power requirements	Two LR03 (size AAA) alkaline batteries (supplied): 3.0 V DC		
Ambient conditions	 Operating temperature: 5 °C - 35 °C (41 °F - 95 °F) Operating humidity: 25% - 75% Storage temperature: -10°C - +45°C (14 °F - 113 °F) Storage humidity: 25% - 75% 		

Dimensions (w/h/d) (not incl. projecting parts and controls)	Approx. 38.3 mm × 114.2 mm × 19.3 mm (1.51 in. × 4.50 in. × 0.76 in.) (Width/Height/Depth)	
Mass	Approx. 74 g (2.7 oz) (including two LR03 (size AAA) alkaline batteries)	
Supplied accessories	See Operating Instructions supplied with your IC recorder.	

^{*1} Some of the built-in memory is used for file management.

Design and specifications are subject to change without notice.

^{*2} Applies when the built-in memory is formatted by the IC recorder.

^{*3} Not all encoders are supported.

^{*4} Playback of the MP3 files recorded by the IC recorder is also supported.

Help Guide

IC Recorder ICD-PX370

Maximum recording time

The following lists the maximum recording time (*1) (*2) per memory by recording mode (recording scene). The maximum recording time is estimated, provided that all the folders in the memory are used.

Built-in memory

REC Mode (REC Scene) (*3)	Maximum recording time	
MP3 192kbps (************************************	39 hours 45 minutes	
MP3 128kbps (🛂 / 🛂)	59 hours 35 minutes	
MP3 48kbps(MONO)	159 hours	

Memory card

REC Mode (REC Scene) (*3)	4 GB	8 GB	16 GB	32 GB
MP3 192kbps (************************************	44 hours 40 minutes	89 hours 25 minutes	178 hours	357 hours
MP3 128kbps (♣️ / ♣♣)	67 hours 5 minutes	134 hours	268 hours	536 hours
MP3 48kbps(MONO)	178 hours	357 hours	715 hours	1,431 hours

^{*1} For long-term continuous recording, a USB AC adaptor (not supplied) is required. For details on the battery life, see Battery life.

^{*2} The maximum recording time in this topic indicates an estimation and may vary depending on the specifications of the memory card.

^{*3} Recording scenes associated with the recording mode by default

Help Guide

IC Recorder ICD-PX370

Maximum playback time/number of music files

The following lists the maximum playback time of a music file and the number of music files (*) by bit rate.

Bit rate	Playback time	Number of files
128 kbps	59 hours 35 minutes	893 files
256 kbps	29 hours 45 minutes	446 files

^{*} Provided that MP3 files of 4 minutes each are transferred to the IC recorder.

Help Guide

IC Recorder ICD-PX370

Battery life

The following lists the battery life(*) for alkaline and rechargeable batteries by REC Mode.

Alkaline battery life

(Measured with continuous use of the LR03 (size AAA) alkaline batteries.)

REC Mode	Recording	Playback with the built-in speaker	Playback with external headphones
MP3 192kbps	Approx. 55 hours	Approx. 18 hours	Approx. 43 hours
MP3 128kbps	Approx. 57 hours	Approx. 18 hours	Approx. 45 hours
MP3 48kbps(MONO)	Approx. 62 hours	Approx. 18 hours	Approx. 45 hours
Music file (MP3 128kbps)	-	Approx. 18 hours	Approx. 45 hours

Rechargeable battery life

(Measured with continuous use of the NH-AAA rechargeable batteries.)

REC Mode	Recording	Playback with the built-in speaker	Playback with external headphones
MP3 192kbps	Approx. 40 hours	Approx. 14 hours	Approx. 34 hours
MP3 128kbps	Approx. 41 hours	Approx. 14 hours	Approx. 34 hours
MP3 48kbps(MONO)	Approx. 47 hours	Approx. 14 hours	Approx. 34 hours
Music file (MP3 128kbps)	-	Approx. 14 hours	Approx. 34 hours

^{*} Measured values acquired under our measurement conditions. These values may decrease depending on the usage conditions.

Help Guide

IC Recorder ICD-PX370

Precautions

On power

DC 3.0 V: Use two LR03 (size AAA) alkaline batteries

DC 5.0 V: when using USB AC adaptor Rated current consumption: 500 mA

On safety

Do not operate the unit while driving, cycling or operating any motorized vehicle.

On handling

- Do not leave the unit in a location near heat sources, or in a place subject to direct sunlight, excessive dust or mechanical shock.
- Should any solid object or liquid fall into the unit, remove the batteries and have the unit checked by qualified personnel before operating it any further.
- When using your IC recorder, remember to follow the precautions below in order to avoid warping the cabinet or causing the IC recorder to malfunction.
 - Do not sit down with the IC recorder in your back pocket.
 - Do not put your IC recorder into a bag with the headphones/earphones cord wrapped around it and subject the bag to strong impact.
- Be careful not to allow water to splash on the unit. The unit is not waterproof. In particular, be careful in the following situations.
 - When you have the unit in your pocket and go to the bathroom, etc.
 When you bend down, the unit may drop into the water and may get wet.
 - When you use the unit in an environment where the unit is exposed to rain, snow, or humidity.
 - In circumstances where you get sweaty. If you touch the unit with wet hands or if you put the unit in the pocket of sweaty clothes, the unit may get wet.
- Listening with this unit at high volume may affect your hearing. For traffic safety, do not use this unit while driving or cycling.
- You may feel pain in your ears if you use the headphones when the ambient air is very dry. This is not because of a malfunction of the headphones, but because of static electricity accumulated in your body. You can reduce static electricity by wearing non-synthetic clothes that prevent the emergence of static electricity.

On noise

- Noise may be heard when the unit is placed near an AC power source, a fluorescent lamp or a mobile phone during recording or playback.
- Noise may be recorded when an object, such as your finger, etc., rubs or scratches the unit during recording.

On maintenance

To clean the exterior, use a soft cloth slightly moistened in water. Then use a soft dry cloth to wipe the exterior. Do not use alcohol, benzine or thinner.

If you have any questions or problems concerning your unit, please consult your nearest Sony dealer.

Backup recommendations

To avoid potential risk of data loss caused by accidental operation or malfunction of the IC recorder, we recommend that you save a backup copy of your recorded files to a computer, etc.

On using a microSD card

- When formatting (initializing) a memory card, make sure to use the IC recorder to format it. Operations of the memory cards formatted with Windows or other devices are not guaranteed.
- If you format a memory card containing recorded data, the recorded data will be deleted. Be careful not to delete important data.
- Do not leave a memory card within the reach of small children. They might accidentally swallow it.
- Do not insert or remove a memory card during recording/playback/formatting. Doing so may cause a malfunction of the IC recorder.
- Do not remove a memory card while the "Accessing," "Saving..." or "Please Wait" message is on the display window. Doing so may damage the data.
- Your IC recorder does not support microSDXC cards with the capacity of 64 GB or more.
- We do not guarantee the operations of all types of compatible memory cards with the IC recorder.
- You cannot use a ROM (read-only-memory) type or write-protected memory card.
- Data may be corrupted in the following cases:
 - When a memory card is removed or the IC recorder is turned off during a read or write operation.
 - When a memory card is used in locations subject to static electricity or electrical noise.
- We assume no responsibility for any loss or damage of recorded data.
- We recommend that you save a backup copy of the important data.
- Do not touch the terminal of a memory card with your hand or a metal object.
- Do not strike, bend or drop a memory card.
- Do not disassemble or modify a memory card.
- Do not expose a memory card to water.
- Do not use a memory card under the following conditions:
 - Locations beyond the required operating conditions, including locations, such as the hot interior of a car parked in the sun and/or in the summer, the outdoors exposed to direct sunlight, or a place near a heater.
 - Humid locations or locations with corrosive substances present.
- When using a memory card, make sure to check the correct insertion direction into the memory card slot.
- Do not put any adhesive label on a memory card as it may cause the card to be stuck in the slot.

Related Topic

Formatting the memory (Format Built-In Memory/Format SD Card)

Help Guide

IC Recorder ICD-PX370

Safety regulations

WARNING

Do not expose the batteries (battery pack or batteries installed) to excessive heat such as sunshine, fire or the like for a long time.

CAUTION

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

- The recorded music is limited to private use only. Use of the music beyond this limit requires permission of the copyright holders.
- Sony is not responsible for incomplete recording/downloading or damaged data due to problems of the IC recorder or computer.
- Depending on the types of the text and characters, the text shown on the IC recorder may not be displayed properly on device. This is due to:
 - The capacity of the connected IC recorder.
 - The IC recorder is not functioning normally.
 - Content information is written in the language or the character that is not supported by the IC recorder.

Help Guide

IC Recorder ICD-PX370

Trademarks

- Microsoft, Windows and Windows Media are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- macOS is a trademark of Apple Inc., registered in the USA and other countries.
- MPEG Layer-3 audio coding technology and patents licensed from Fraunhofer IIS and Thomson.
- microSD, microSDHC and microSDXC logos are trademarks of SD-3C, LLC.







All other trademarks and registered trademarks are trademarks or registered trademarks of their respective holders. Furthermore, "™" and "®" are not mentioned in each case in this Help Guide.

The "Sound Organizer 2" uses software modules as shown below: Windows Media Format Runtime

Help Guide

IC Recorder ICD-PX370

Notice for users

All rights reserved. This Help Guide or the software described herein, in whole or in part, may not be reproduced, translated or reduced to any machine readable form without prior written approval from Sony Corporation. IN NO EVENT SHALL SONY CORPORATION BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, WHETHER BASED ON TORT, CONTRACT, OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS HELP GUIDE, THE SOFTWARE OR OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF.

Sony Corporation reserves the right to make any modification to this Help Guide or the information contained herein at any time without notice.

What you record is for personal enjoyment and use only. Copyright laws prohibit other forms of use without the permission of the copyright holders.

Help Guide

IC Recorder ICD-PX370

License

Notes on the License

This IC recorder comes with software that are used based on licensing agreements with the owners of that software. Based on requests by the owners of copyright of these software applications, we have an obligation to inform you of the following. Please read the following sections.

Licenses (in English) are recorded in the internal memory of your IC recorder. Establish a Mass Storage connection between the IC recorder and a computer to read licenses in the "LICENSE" folder.

On GNU GPL/LGPL applied software

The software that is eligible for the following GNU General Public License (hereinafter referred to as "GPL") or GNU Lesser General Public License (hereinafter referred to as "LGPL") are included in the IC recorder.

This informs you that you have a right to have access to, modify, and redistribute source code for these software programs under the conditions of the supplied GPL/LGPL.

Source code is provided on the web. Use the following URL to download it.

http://www.sony.net/Products/Linux/

We would prefer you do not contact us about the contents of source code.

Licenses (in English) are recorded in the internal memory of your IC recorder. Establish a Mass Storage connection between the IC recorder and a computer to read licenses in the "LICENSE" folder.

Help Guide

IC Recorder ICD-PX370

Customer support websites

Please access the following support home page to get the support information about your IC recorder:

For customers in Europe:

http://www.sony.eu/DNA

For customers in Latin America:

http://www.sony-latin.com/index.crp

For customers in the U.S.A.:

http://www.sony.com/recordersupport

For customers in Canada:

http://www.sony.ca/ElectronicsSupport

For customers in China:

https://service.sony.com.cn

For customers in other countries/regions:

http://www.sony-asia.com/support

Note that recorded files may be deleted during service or repair services.

Help Guide

IC Recorder ICD-PX370

Troubleshooting

Before taking your IC recorder for repair, check it as follows.

- Check the items listed in "Troubleshooting."
- Remove the batteries from the compartment and insert them back in.
 Some problems may be solved when you remove the batteries from the compartment and insert them back in.
- Check the Sound Organizer 2 help.
 For details on the operation of Sound Organizer 2, refer to the Sound Organizer 2 help.

Should any problem persist after you have made these checks, consult your nearest Sony dealer.

Please access the following support home page to obtain the latest support information about the IC recorder:

For customers in Europe:

http://support.sony-europe.com/DNA

For customers in Latin America:

http://www.sony-latin.com/index.crp

For customers in the U.S.A.:

http://www.sony.com/recordersupport

For customers in Canada:

http://www.sony.ca/ElectronicsSupport

For customers in China:

https://service.sony.com.cn

For customers in other countries/regions:

http://www.sony-asia.com/support

Note that recorded files may be deleted during repair services.

Related Topic

- Customer support websites
- The Sound Organizer 2 window (for Windows only)

Help Guide

IC Recorder ICD-PX370

The recorded file is noisy and is hard to understand.

• Ambient noise is recorded as well as human voices.

If you apply the Clear Voice function ("Clear Voice 1" or "Clear Voice 2,") to the playback audio, ambient noise in all frequency bands (noise from projectors or air conditioners, etc.) will be reduced to make human voices distinctive, and you will hear human voices more clearly.

While playback with the built-in speaker or playback of the files in " Music" is in progress, however, the Clear Voice function does not work.

Related Topic

Reducing noise in the playback audio to make human voices sound clearer – the Clear Voice function

Help Guide

IC Recorder ICD-PX370

The recorded file is noisy and you want to record with less noise.

• With the Recording Filter function ("NCF(Noise Cut)" or "LCF(Low Cut)"), you can reduce noise in the recordings. Additionally, you can use the Scene Select function to change some recording settings, including the recording mode and the sensitivity level of the built-in microphone, at once by selecting one of the recording scenes.

Related Topic

- Reducing noise during recording (Recording Filter)
- Selecting a recording scene for an individual situation

Help Guide

IC Recorder ICD-PX370

A rustling noise is recorded.

• If you accidentally touch your IC recorder or let an object come in contact with it while recording is in progress, rustling noises may be recorded. Keep your hand away from the IC recorder until you finish recording.

Help Guide

IC Recorder ICD-PX370

A buzzing or humming noise is recorded.

 A buzzing or humming noise may be recorded if your IC recorder is placed near an AC power source, a fluorescent lamp, or a mobile phone during recording or playback.
 Keep the IC recorder away from such devices when recording.

Help Guide

IC Recorder ICD-PX370

Noise is recorded when you use an external microphone (not supplied) for recording.

The plug of the connected external microphone is dirty.
 Clean the plug.

Help Guide

IC Recorder ICD-PX370

You hear noise when using headphones (not supplied) for playback.

The plug of the connected headphones is dirty.
 Clean the plug.

Help Guide

IC Recorder ICD-PX370

The volume of the audio you recorded from an external device is low or you hear squeaking noises when you listen to the audio via the built-in speaker.

• If you record audio from a monaural external device that is connected to your IC recorder with a stereo connection cable, playing the recorded files may sound low in volume or make squeaking noises when you listen to the audio via the built-in speaker. This is because the left and right audio signal output is reversed in phase, and does not indicate a malfunction.

Be sure to use an audio cable with a monaural plug to record audio from a monaural external device.

Help Guide

IC Recorder ICD-PX370

You hear noise during playback even with the Clear Voice function turned on.

■ While playback with the built-in speaker or playback of the files in " ▶ Music" is in progress, the Clear Voice function does not work.

Help Guide

IC Recorder ICD-PX370

The IC recorder does not turn on or pressing any button does not work.

- The batteries are running out of power. Replace them with new ones.
- Make sure that the batteries are inserted with the correct polarity.
- Your IC recorder is turned off.
 Slide the HOLD•POWER switch to "POWER" and hold it until the display window turns on.
- Your IC recorder is placed in the HOLD state.
 Slide the HOLD•POWER switch to the center dot.

Related Topic

- Inserting batteries
- Using the IC recorder with the USB AC adaptor
- Turning the power on
- Parts and controls
- Releasing the IC recorder from the HOLD state

Help Guide

IC Recorder ICD-PX370

The IC recorder does not turn off.

• Slide and hold the HOLD•POWER switch to "POWER" and hold it until "Power Off" appears on the display window.

Related Topic

- Turning the power off
- Parts and controls

Help Guide

IC Recorder ICD-PX370

The IC recorder automatically turns off.

• The Auto Power Off function on your IC recorder is set to "10min" by default to save battery power. If you leave the IC recorder unused for 10 minutes, it will automatically turn off. You can change the current setting with the Settings menu.

Related Topic

Setting the time period before the IC recorder automatically turns off (Auto Power Off)

Help Guide

IC Recorder ICD-PX370

The battery life is short.

- Measured values acquired under our measurement conditions. These values may decrease depending on the usage conditions.
- Your IC recorder still consumes slight battery power while no operations are in progress. If you do not intend to use the IC recorder for an extended period of time, it is recommended that you turn the power off. It is also recommended that you set "Auto Power Off" to a shorter period of time. This will help you save battery power in case you forget to turn off the power of the IC recorder.
- You are using your IC recorder under the temperature of 5 °C (41 °F) or below where the battery wears quickly. This is due to the characteristics of the battery and does not indicate a malfunction.
- Manganese batteries are inserted in the compartment. Your IC recorder does not support manganese batteries.

Related Topic

- Turning the power off
- Setting the time period before the IC recorder automatically turns off (Auto Power Off)
- Battery life

Help Guide

IC Recorder ICD-PX370

The IC recorder does not operate correctly.

- Remove the batteries from the compartment and insert them back in.
- You may have formatted the built-in memory of your IC recorder with a computer.
 Be sure to use the IC recorder for formatting.

Related Topic

Formatting the memory (Format Built-In Memory/Format SD Card)

Help Guide

IC Recorder ICD-PX370

The operation indicator does not light.

"LED" is set to "OFF." Set "LED" to "ON."

Related Topic

Turning the operation indicator on or off (LED)

Help Guide

IC Recorder ICD-PX370

You cannot record a file.

• The remaining recording time is insufficient.

Related Topic

• Checking the remaining recording time (Available Rec. Time)

Help Guide

IC Recorder ICD-PX370

Recording is interrupted.

• The VOR function is turned on. To turn off the VOR function, set "VOR" to "OFF."

Related Topic

Recording automatically in response to the input sound volume – the VOR function

Help Guide

IC Recorder ICD-PX370

The input audio volume is too loud or not loud enough when you record audio from an external device.

- Use an audio connection cable to connect your IC recorder to an external device and adjust the volume level on the external device.
- If you use an audio connecting cable with high resistance, the recording volume will decrease. Use an audio connecting cable without resistance.

Help Guide

IC Recorder ICD-PX370

The playback volume is low.

- The built-in speaker is provided mainly for checking recorded audio files. If you find the volume not loud enough or have difficulty in understanding what you hear, use headphones (not supplied).
- The recording volume may be low. Check the sensitivity level of the built-in microphone and the Scene Select setting.

Related Topic

- Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity)
- Selecting a recording scene for an individual situation
- Tips for better recording

Help Guide

IC Recorder ICD-PX370

You hear no sound from the built-in speaker.

• Headphones (not supplied) are connected to your IC recorder. Disconnect the headphones.

Help Guide

IC Recorder ICD-PX370

You hear sound from the built-in speaker even when headphones (not supplied) are connected.

• When the headphones connection is loose, you may hear sound from the built-in speaker as well. Disconnect the headphones and connect them once again.

Help Guide

IC Recorder ICD-PX370

Playback speed is too fast or too slow.

The DPC (Digital Pitch Control) setting is set to "ON," and you have changed the playback speed. Set the DPC (Digital Pitch Control) setting to "OFF," or change the playback speed to normal.

Related Topic

Adjusting the playback speed – the DPC (Digital Pitch Control) function

Help Guide

IC Recorder ICD-PX370

You cannot divide a file.

- You need a certain amount of free space in the built-in memory to divide a file.
- Because of the system limitations, you may not be able to divide a file at the very beginning or at the very end of the file.
- You cannot divide files other than those recorded by the IC recorder (e.g. a file transferred from a computer).

Related Topic

Deleting a file

Help Guide

IC Recorder ICD-PX370

You cannot move a file.

You cannot move files in " Music" to another folder in the built-in memory or the microSD card.

Related Topic

Protecting a file

Help Guide

IC Recorder ICD-PX370

You cannot copy a file to a different folder.

• You cannot copy files in " 🞵 Music" to another folder in the built-in memory or the microSD card.

Help Guide

IC Recorder ICD-PX370

The folder or file you created is not displayed.

• If you have created a folder or file on the computer, your IC recorder may fail to detect it depending on where you created it. For more information, see Structure of folders and files.

Help Guide

IC Recorder ICD-PX370

The recording date of a file appears as "----/--" or "--:--."

• The file may have been recorded by a model of the IC recorder other than ICD-PX370. The date and time recording format varies depending on the model.

Help Guide

IC Recorder ICD-PX370

The clock setting is reset.

• Once you have removed the batteries from the compartment and inserted them back in or you have replaced the batteries with new ones, the Set Date/Time screen appears on the display widow. On this screen, you see the date and time of the last operation you made with your IC recorder before you removed the batteries. Be sure to change the date and time to the current ones.

Help Guide

IC Recorder ICD-PX370

The remaining recording time on the display window is shorter than the one displayed on the computer.

• As the remaining recording time on the display window is calculated by subtracting the memory capacity required for system operations from the remaining built-in memory capacity, it may not be consistent with the one that Sound Organizer 2 shows on the computer.

Help Guide

IC Recorder ICD-PX370

The "Memory Full" message appears and you cannot start recording.

The built-in memory is full.
 Delete unnecessary files from the built-in memory, or copy some files to another microSD card or a computer and delete the files.

Related Topic

Deleting a file

Help Guide

IC Recorder ICD-PX370

The "File Full" message appears and you cannot operate the IC recorder.

• With both the built-in memory and the inserted microSD card, your IC recorder is capable of storing up to 5,000 folders and files all together in total.

Delete unnecessary files from the built-in memory, or copy some files to another microSD card or a computer and delete the files.

Related Topic

Deleting a file

Help Guide

IC Recorder ICD-PX370

The microSD card is not detected.

Remove the microSD card and insert it in the correct orientation.

Related Topic

Inserting a memory card

Help Guide

IC Recorder ICD-PX370

A folder or file name appears in unreadable characters.

Some characters you use on Windows Explorer or Mac Finder are not supported by your IC recorder. Folder and file names containing such characters appear in unreadable characters on the IC recorder.

Help Guide

IC Recorder ICD-PX370

Copying a file takes time.

• If the size of a file is large, it takes a considerable time to finish copying. Wait until the copying finishes.

Help Guide

IC Recorder ICD-PX370

The IC recorder is not detected by the computer and you cannot transfer folders/files from the computer.

- Disconnect your IC recorder from the computer and connect it once again.
- If your IC recorder is connected to the computer with a USB hub (not supplied) or a USB extension cable (not supplied), remove the hub or cable and connect the IC recorder directly to a USB port on the computer.
- With the computer that does not meet the system requirements described in this Help Guide, successful operations are not guaranteed.
- Your IC recorder may not be detected by the computer, depending on the USB port. Try another USB port on the computer.

Related Topic

- System requirements
- System requirements for Sound Organizer 2

Help Guide

IC Recorder ICD-PX370

The file you transferred from the computer does not appear on the IC recorder and you cannot play the file.

- Your IC recorder is capable of displaying up to 8 folder levels.
- Your IC recorder supports the MP3 (.mp3) format. Files in other formats may not be detected by the IC recorder. See the technical specifications of your IC recorder.
- Your IC recorder is capable of detecting up to 5,000 folders and files all together in total. Delete unnecessary files and folders or copy some files to another microSD card or a computer and delete the files.
- If you have created a folder or file on the computer, your IC recorder may fail to detect it depending on where you created it. For more information, see Structure of folders and files.

Related Topic

- Structure of folders and files
- Technical specifications

Help Guide

IC Recorder ICD-PX370

The computer does not start.

• If you start the computer with your IC recorder connected to the computer, the computer may freeze or may not start properly.

Disconnect the IC recorder from the computer and start the computer once again.

Related Topic

Disconnecting the IC recorder from the computer

Help Guide

IC Recorder ICD-PX370

You cannot install Sound Organizer 2.

- The capacity of the computer's hard disk is insufficient.
 Check the hard disk capacity.
- You cannot install Sound Organizer 2 on the computer with the operating system that is not supported by the software.
 - Install the software on the computer with the supported operating system.
- You are attempting to log on to Windows with a Guest account.
 Make sure to log on with a user name with computer administrator privileges.

Related Topic

System requirements for Sound Organizer 2

Help Guide

IC Recorder ICD-PX370

The IC recorder is not detected by Sound Organizer 2.

- Check if the software is successfully installed, and then check the connections with your IC recorder as follows:
 - When you are using a USB hub, remove the hub and connect the IC recorder directly to a USB port on the computer.
 - Disconnect and then connect the IC recorder once again.
 - Connect the IC recorder to another USB port.
- The computer may be placed in sleep/hibernate mode.
 Change the power saving mode settings to keep the computer in normal mode.
- Save a backup copy of all of the data stored on the built-in memory or the microSD card of your IC recorder to the computer, and then format the built-in memory or the microSD card with the IC recorder.

Related Topic

Formatting the memory (Format Built-In Memory/Format SD Card)

Help Guide

IC Recorder ICD-PX370

The playback volume of the computer is low or you hear no audio from the computer.

- The computer has no sound board.
- The computer has no built-in speakers or no external speakers are connected.
- The volume of the computer is turned off.
- Turn up the volume of the computer. (Refer to the instruction manual of the computer.)
- You can change the volume of WAV files and save them using the Increase Volume feature of the Microsoft Sound Recorder.

Help Guide

IC Recorder ICD-PX370

You cannot play or edit stored files.

Sound Organizer 2 is only capable of playing files in the supported format. Depending on the file format, you cannot use part of editorial features of the software. Refer to the help files of Sound Organizer 2.

Related Topic

The Sound Organizer 2 window (for Windows only)

Help Guide

IC Recorder ICD-PX370

The counter or slider does not operate correctly or you hear noise.

- You may be attempting to play one of the divided files.
 Save the file on the computer (*), and then transfer it to your IC recorder. The file data will be optimized.
 - * Select one of the file formats supported by the IC recorder to save the file.

Related Topic

Technical specifications

Help Guide

IC Recorder ICD-PX370

Operations slow down as the number of stored files increases.

 Regardless of the recording length of files, operations slow down as the total number of files stored on your IC recorder increases.

Help Guide

IC Recorder ICD-PX370

The computer seems to freeze while a file is being saved, added, or deleted.

It takes a longer time to copy or delete a large file.
 Wait until the copying or deleting finishes.

Help Guide

IC Recorder ICD-PX370

Sound Organizer 2 freezes during start-up.

- While the computer is accessing your IC recorder, do not disconnect any cables as it may cause unstable computer operations or data corruption.
- There may be a conflict between Sound Organizer 2 and another driver or application.

Help Guide

IC Recorder ICD-PX370

List of messages

HOLD... Slide HOLD Switch to Activate.

All the buttons are disabled because your IC recorder is in the HOLD state to prevent unintentional operations. Slide the HOLD•POWER switch to the center dot to release the IC recorder from the HOLD state. (See Releasing the IC recorder from the HOLD state.)

Low Battery Level

You cannot format the memory or delete all the files in a folder because of insufficient battery power. Replace the batteries (size AAA) with new ones.

(See Inserting batteries.)

Low Battery

Your IC recorder does not work because its batteries have worn out. Replace the batteries (size AAA) with new ones. (See Inserting batteries.)

SD Card Error

- An error was detected when you inserted a microSD card into the microSD card slot. Remove the microSD card and insert it once again. If this message keeps appearing, use a new microSD card.
- The microSD card is write-protected.
- You inserted a read-only microSD card. You cannot use the read-only microSD card on your IC recorder.

Memory Full

The remaining capacity of the built-in memory or the microSD card is insufficient. Delete some files and repeat the recording once again.

(See Deleting a file.)

File Full

The sum of folders and files or the total number of files has reached the limit. You cannot create any more files. Delete some files and create the file once again.

(See Deleting a file.)

Track Marks are Full

The number of track marks has reached the limit. You cannot add any more track marks. Delete some unnecessary track marks.

(See Deleting a track mark.)

Built-In Memory Needs to be Formatted / SD Card Needs to be Formatted

• The built-in memory or the microSD card has been formatted by a computer. Your IC recorder cannot create the required management file for operations. Make sure that you use the IC recorder, not a computer, to format the builtin memory or the microSD card.

(See Formatting the memory (Format Built-In Memory/Format SD Card).)

The built-in memory or the microSD card does not contain the REC_FILE folder. Formatting the built-in memory or the microSD card automatically creates the REC_FILE folder.

(See Formatting the memory (Format Built-In Memory/Format SD Card).)

Process Error

Make a backup copy of your necessary data and use the IC recorder to format the built-in memory or the microSD

(See Formatting the memory (Format Built-In Memory/Format SD Card).)

- A file system error was detected in the built-in memory or the microSD card. It may have been formatted by a computer. Use your IC recorder to format the built-in memory or the microSD card. (See Formatting the memory (Format Built-In Memory/Format SD Card).)
- If the above actions do not work, consult your nearest Sony dealer.

No folder

- The memory storage you selected as the move/copy destination does not contain any folders. Create a folder and repeat the operation once again.
 (See Creating a folder.)
- The REC_FILE folder does not contain any folders. Create a folder and repeat the operation once again.
 (See Creating a folder)

No File

The folder you selected does not contain any files. There is no file that you move or copy.

No Track Marks

The file you selected does not have any track marks that you can delete. Selecting "At All Track Marks" for "Divide" with the OPTION menu does not work, either.

Cannot Format SD Card Because No SD Card Is Inserted

Your IC recorder does not have a microSD card inserted. Insert a microSD card. (See Inserting a memory card.)

No SD Card

Your IC recorder does not have a microSD card inserted. "Move to SD Card" and "Copy to SD Card" of the "Move/Copy File" operation do not work.

Cannot Add Additional Folders

- The sum of folders and files has reached the limit. You cannot create any more files. Delete some folders or files and create the folder once again.
 (See Deleting a file and Deleting a folder.)
- The sequential number of the folder name has reached the limit. Delete unnecessary folders and create the folder once again.

(See Deleting a folder.)

Could Not Create Folder

- The microSD card is write-protected. Unlock the microSD card.
- A file system error was detected in the built-in memory or the microSD card. It may have been formatted by a computer. Use your IC recorder to format the built-in memory or the microSD card. (See Formatting the memory (Format Built-In Memory/Format SD Card).)

Could Not Delete Folder

- The microSD card is write-protected. Unlock the microSD card.
- A file system error was detected in the built-in memory or the microSD card. It may have been formatted by a computer. Use your IC recorder to format the built-in memory or the microSD card. (See Formatting the memory (Format Built-In Memory/Format SD Card).)

File Protected

The file you selected is protected or "read-only." You cannot delete the file. Use your IC recorder to remove protection from the file, or use a computer to clear the read-only property. (See Protecting a file.)

Protected Files Not Deleted

The file you selected is protected or "read-only." Use your IC recorder to remove protection from the file, or use a computer to clear the read-only property, and then delete the file once again. (See Protecting a file.)

Some Data Not Deleted

If the selected folder contains sub-folders, the sub-folders and their files will not be deleted.

Unknown Data

- This data is not in a file format that is supported by your IC recorder. The IC recorder supports MP3 (.mp3) files.
 (See Technical specifications.)
- You cannot play back copyright protected files.
- The file you selected is corrupted. You cannot play or edit it.

File in Format That Does Not Allow Editing

- You cannot divide the file that you edited using an application other than Sound Organizer 2.
- This data is not in a file format that is supported by your IC recorder. The IC recorder supports MP3 (.mp3) files.
 (See Technical specifications.)

Invalid Operation

- A file system error was detected in the built-in memory or the microSD card. It may have been formatted by a computer. Use your IC recorder to format the built-in memory or the microSD card. (See Formatting the memory (Format Built-In Memory/Format SD Card).)
- The built-in memory has a bad block. You cannot write data on the card. You need to repair your IC recorder.
- The microSD card has a bad block. You cannot write data on the card. Replace the microSD card with a new one.
- The remaining capacity of the built-in memory or the microSD card is insufficient. You cannot rename any folder.
 Delete unnecessary folders or files and repeat the operation once again.
 (See Deleting a folder and Deleting a file.)
- The sequential number of the folder or file name has reached the limit. Delete unnecessary folders or files and repeat
 the operation once again.
 (See Deleting a folder and Deleting a file.)
- The file name exceeds the maximum number of characters. You cannot divide the file. Shorten the file name.
- There is a track mark immediately before or after the point where you want to divide the file. Selecting "At All Track Marks" for "Divide" with the OPTION menu does not work.
- There is a track mark near the beginning or end of the file. Selecting "At All Track Marks" for "Divide" with the OPTION menu does not work.
- You cannot divide the file at a point near the beginning or end of the file.
- There is a file with the same name that has track marks. You cannot move, copy, or divide the file.

New File

The recording file has reached the maximum size limit (1 GB for an MP3 file). The file will be divided automatically and recording will continue as a new file.

Cannot Divide - Exceeds Max Number of Files in Folder

The sum of files in a folder or the total number of files will exceed the limit. You cannot divide the file. Delete unnecessary files and divide the file once again. (See Deleting a file.)

Same File Name Exists

There already is a file with the same name. You cannot create more than one file with the same name.

System Error

A system error was detected for some reason. Consult your nearest Sony dealer.

Only Activated When Built-In Microphone Used

You are attempting to change the sensitivity level of the built-in microphone while your IC recorder has an external microphone connected. You can only make a change to "Built-In Mic Sensitivity" while the built-in microphone is active as the input source.

(See Selecting the sensitivity level of the built-in microphone (Built-In Mic Sensitivity).)

Only Activated When External Input Used

You are attempting to change the audio input type to an external microphone while your IC recorder does not have it connected. You can only make a change to "Ext. Input Setting" while an external microphone is connected. (See Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting).)

Operation Invalid While Playing

You have selected a menu item on the OPTION or HOME menu that is not available for execution during playback. Stop playback and select the item once again.

Operation Invalid While Recording

You have selected a menu item on the OPTION or HOME menu that is not available for execution during audio recording. Stop recording and select the item once again.

Deactivated When Audio IN Used

You are attempting to change the Recording Filter setting while "Ext. Input Setting" is set to "Audio IN." The Recording Filter function does not work while "Audio IN" is selected.

(See Selecting the audio input type and the sensitivity level of the external microphone (Ext. Input Setting) and Reducing noise during recording (Recording Filter).)

Help Guide

IC Recorder ICD-PX370

System limitations

Due to some system limitations on your IC recorder, you may encounter the following issues that do not indicate malfunctions.

Music files are not displayed in the sequence you expected or you cannot play them in that sequence.

The music files you transferred from a computer to your IC recorder are sorted by meta-data track number or file name.

A recording file is divided automatically.

If the file size reaches the maximum limit (1 GB for an MP3 file) during recording, the file will be divided and some of the recording may be lost around the divided point.

All characters appear in uppercase.

Depending on the character combination, the folder name you entered on a computer may appear in uppercase on your IC recorder.

Unreadable characters or _ appear in the folder, tile, artist, or file name.

You used the characters that your IC recorder is not capable of displaying. Do not use 2-bite characters.

The A-B repeat segment you specified is not where you intended.

This may occur in some files.

The remaining recording time decreases when you divide a file.

Your IC recorder uses some memory space for managing divided files, resulting in a decrease in the remaining recording time.