

Vlog-monitor
XQZ-IV01



Vorbereiden

[Over deze Helpgids](#)

[Overzicht van de onderdelen](#)

[Een greep bevestigen](#)

[Een smartphone bevestigen](#)

[De monitor bevestigen](#)

[Een smartphone aansluiten](#)

[Een microfoon bevestigen](#)

Gebruiken als selfiemonitor

[Opnemen](#)

[Opnemen terwijl u een smartphone oplaadt](#)

Softwarelicentie, juridische informatie

[Opmerkingen over de softwarelicentie](#)

[Juridische informatie](#)

Vlog-monitor
XQZ-IV01

Over deze Helpgids

Dit is de Helpgids van de Vlog-monitor XQZ-IV01.

Opmerking

- Updates voor het systeem en de applicatie kunnen de apparaatfuncties op een andere manier weergeven dan in deze Helpgids wordt beschreven.

Opmerkingen over het gebruik

Lees zeker de bijgeleverde "Belangrijke informatie".

Over dit toestel


U kunt dit toestel aan de achterkant van een Xperia bevestigen en het combineren met een statief enz. om selfies te maken met de hoofdcamera van de Xperia.

Het volgende Xperia-model is compatibel met dit toestel.

- Sony-smartphone Xperia PRO-I (DC 5,0 V / 0,4 A)
- Sony-smartphone Xperia 1 VI (DC 5,0 V / 0,4 A)
- Sony-smartphone Xperia 1 V (DC 5,0 V / 0,4 A)
- Sony-smartphone Xperia 1 IV (DC 5,0 V / 0,4 A)
- Sony-smartphone Xperia 5 V (DC 5,0 V / 0,4 A)
- Sony-smartphone Xperia 5 IV (DC 5,0 V / 0,4 A)


Overzicht van de onderdelen

Monitor

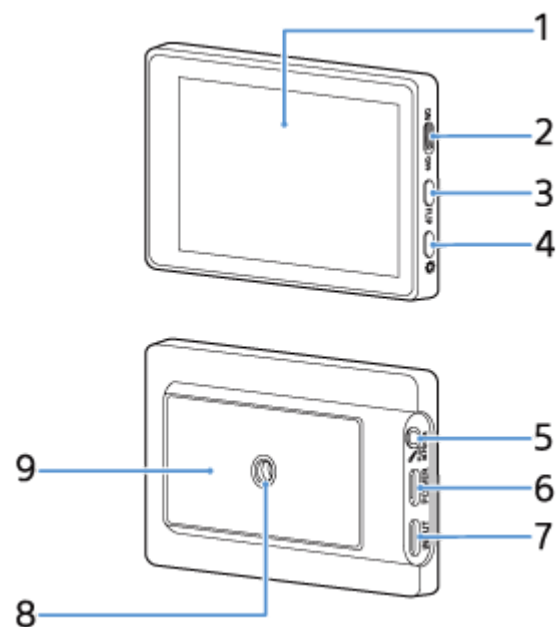

1. Lcd-scherm (grootte: 3,5 inch / resolutie: 1280 × 720)
2. ON/OFF-schakelaar (scherm AAN/UIT)
3. FLIP-knop (scherm kantelen)
4. ⚙️-knop (regeling helderheid)
5. 🎤-microfoonaansluiting
6. POWER-poort (opladen)
7. INPUT-poort (invoer)
8. Bevestigingsopening voor statief
9. Houderbevestigingszone

Houder

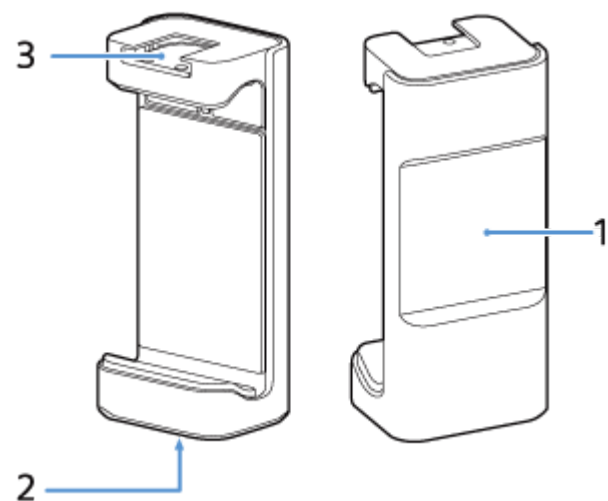

1. Magneet voor bevestigen monitor
2. Bevestigingsopening voor statief
3. Accessoireschoen

Verbindingskabel




F-755-100-36(1) Copyright 2021 Sony Corporation


Een greep bevestigen

U kunt een greep met cameramontageschroef bevestigen.

- 1 Steek de cameramontageschroef van de greep in de statiefbevestigingsopening van de houder.

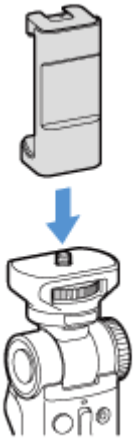

- 2 Draai aan het cameramontagewiel van de greep om de houder vast te draaien.




Opmerking


- Gebruik een statief met een schroef die korter is dan 5,5 mm. Het is niet mogelijk om de houder stevig aan het statief te bevestigen als de schroef 5,5 mm of langer is; het toestel kan hierdoor beschadigd raken.

Een smartphone bevestigen

- 1 Breng de houder aan tussen de cameraloets (a) en de aan-uitknop (b) van de smartphone.

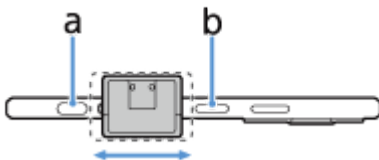


- 2 Plaats de smartphone tegen de bovenkant van de houder.

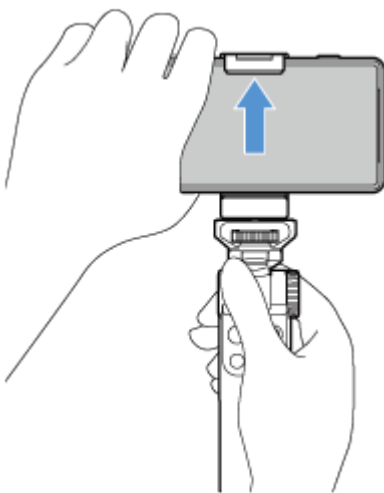


- 3 Breng de smartphone tegen de onderkant van de houder.

Plaats de smartphone zodat er geen openingen tussen de houder en smartphone zichtbaar zijn.

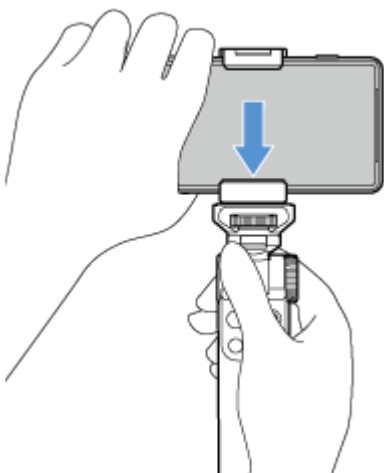

Opmerking

- Let op dat uw vinger niet geklemd raakt tussen de houder en de smartphone. Dit kan letsels veroorzaken.

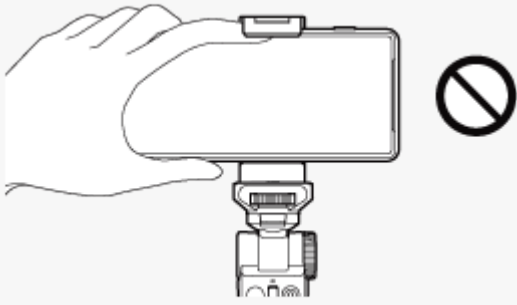


- Wees voorzichtig bij het bevestigen van de smartphone, zodat u geen krassen maakt.


F-755-100-36(1) Copyright 2021 Sony Corporation

De monitor bevestigen

- 1 Breng de houderbevestigingszone van de monitor (b) tegen het magnetische deel van de houder (a) om de monitor correct te bevestigen.

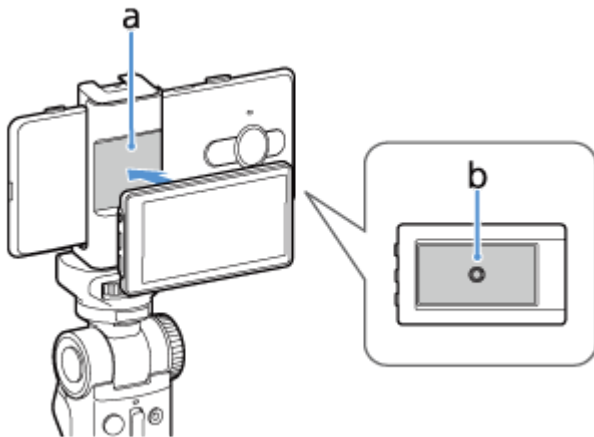

- 2 Breng de monitor naar de juiste positie.

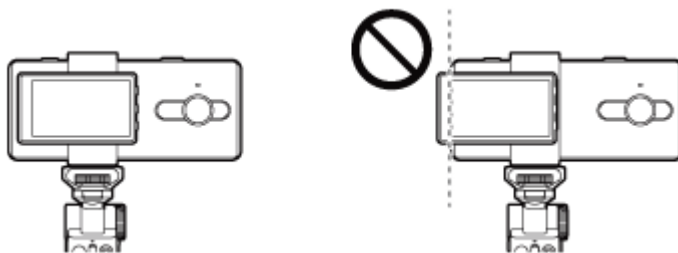


- Controleer of de monitor de smartphonecamera niet blokkeert.
- Zorg ervoor dat de linkerkant van de monitor niet buiten de smartphone steekt. Dit kan namelijk de communicatie verstoren.

Opmerking

- Als u de monitor fout bevestigt, kan deze vallen, met letsels of schade aan het toestel tot gevolg.

Een smartphone aansluiten

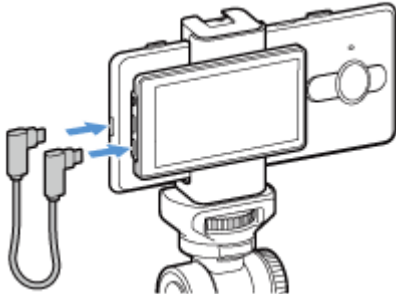

- 1 Sluit een uiteinde van de verbindingkabel die bij dit toestel geleverd is aan op de smartphone.
- 2 Steek het andere uiteinde van de verbindingkabel in de INPUT-poort (invoer) van de monitor.


Opmerking

- Als u tijdens een opname de verbindingkabel loskoppelt, wordt de opname onderbroken. In dat geval verschijnt er mogelijk een bericht op de smartphone om het toestel opnieuw aan te sluiten. Volg de instructies.
- We kunnen geen correcte werking garanderen als u een andere kabel gebruikt dan de verbindingkabel die bij dit toestel geleverd is. Gebruik altijd de bijgeleverde verbindingkabel.
- Bij het aansluiten van de verbindingkabel knippert de monitor kort door de activering. Dit is geen storing.

Een microfoon bevestigen

U kunt een microfoon bevestigen aan de accessoireschoen van het toestel. Raadpleeg hiervoor de handleiding van de microfoon.


- 1 **Breng de voet van de microfoon op een lijn met de accessoireschoen op de houder en bevestig de microfoon.**

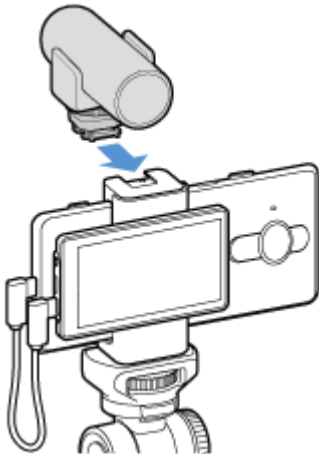

- 2 **Verdraai de vergrendelknop van de microfoon om de microfoon vast te maken aan de houder.**



- 3 **Sluit de microfoon met behulp van de verbindingkabel die bij de microfoon geleverd is aan op de 3,5 mm - microfoonaansluiting van de monitor.**

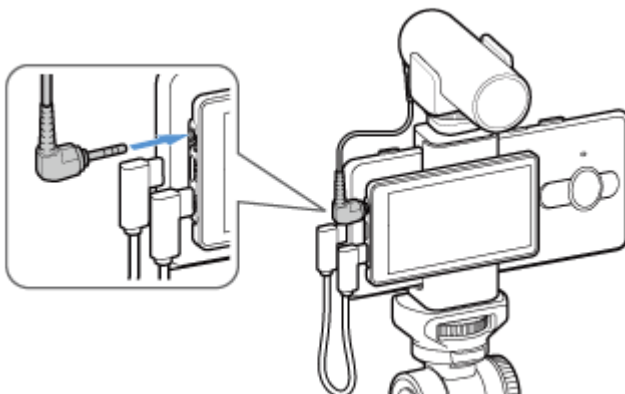

Hint

- Wanneer er een microfoon aangesloten wordt op de -microfoonaansluiting van de monitor van dit toestel, wordt de interne microfoon van de smartphone automatisch omgeschakeld naar de externe microfoon.

Opmerking


- Sluit de microfoon aan voor u de app opent.

F-755-100-36(1) Copyright 2021 Sony Corporation

Opnemen


1 Schakel de smartphone in en open een compatibele app.

Voorbeeld: Photography Pro, Videography Pro



2 Zet de ON/OFF-schakelaar (scherm AAN/UIT) op "ON".

Het beeld van de camera wordt via de smartphone uitgevoerd naar het lcd-scherm van dit toestel.

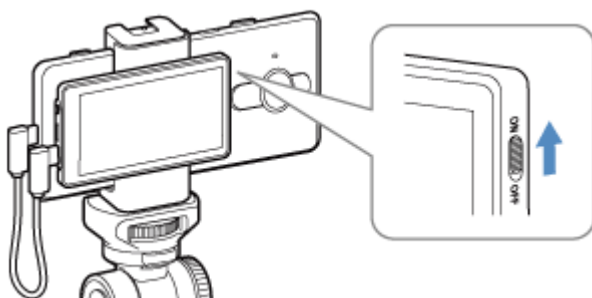

Het scherm kantelen

Druk op de FLIP-knop (scherm kantelen).

Telkens wanneer u op deze knop drukt, wijzigt de schermstand als volgt.

Gespiegeld → Echt → Echt, ondersteboven → Gespiegeld, ondersteboven

De helderheid aanpassen


Druk op de -knop (regeling helderheid).

Telkens wanneer u op deze knop drukt, wijzigt de helderheid als volgt.

Hoog → Boost → Laag → Gemiddeld

Opnemen terwijl u een smartphone oplaadt

U kunt opnames maken tijdens het opladen van de smartphone die via een USB-kabel voor het opladen van smartphones met dit toestel verbonden is.

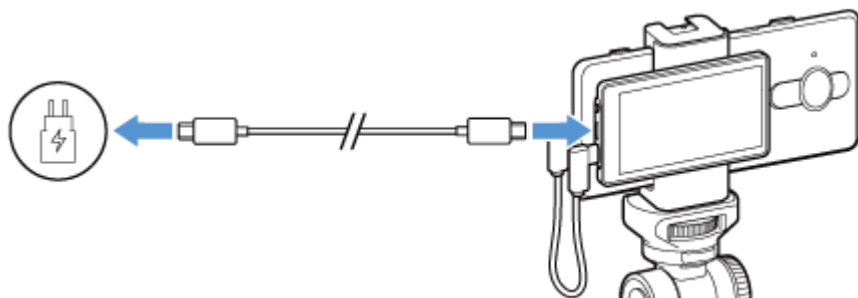

- 1 Sluit dit toestel aan op een smartphone.
- 2 Steek een uiteinde van de USB-kabel in de USB-poort van een lader.
- 3 Steek de stekker van de lader in een stopcontact.
- 4 Steek het andere uiteinde van de USB-kabel in de POWER-poort (opladen) van dit toestel.

Opmerking

- Als u opnames maakt terwijl u een smartphone oplaadt en de USB-kabel loskoppelt, wordt de opname onderbroken. In dat geval verschijnt er mogelijk een bericht op de smartphone om het toestel opnieuw aan te sluiten. Volg de instructies.
- Als de smartphone uitgeschakeld is, is het niet mogelijk om deze op te laden via dit toestel.
- Als de smartphone uitgeschakeld is, moet u deze loskoppelen van het toestel en de lader. Doet u dat niet, dan kan de smartphone defect raken.
- Gebruik altijd de volgende originele lader en USB-kabel van Sony, omdat andere soorten laders de oplaadduur mogelijk doen toenemen, helemaal niet opladen of uw apparaat zelfs kunnen beschadigen.
 - De lader en kabel die geleverd zijn bij het Xperia-model dat compatibel is met dit toestel
 - Sony-snellader XQZ-UC1 (DC 5,0 V / 3,0 A) en USB-kabel
- De INPUT-poort en POWER-poort van dit toestel zijn van het type USB Type-C®.
- Gebruik altijd de bijgeleverde verbindingkabel om dit toestel op een smartphone aan te sluiten. We kunnen geen correcte werking garanderen als u een andere kabel gebruikt dan de verbindingkabel die bij dit toestel geleverd is.
- Wanneer u een lader aansluit op dit toestel, wordt stroom via de POWER-poort aan de INPUT-poort en vervolgens aan de smartphone geleverd.
- De nominale uitvoerwaarde van de INPUT-poort van dit toestel naar de smartphone is DC 5,0 V / 2,6 A.

Opmerkingen over de softwarelicentie

In dit onderdeel wordt de software behandeld die door dit product wordt gebruikt.

Notices for file(s):

SDK components and board peripheral drivers

SDK examples (USB VCOM)

SDK examples (PD)

SDK Peripheral Driver

SDK SoC files

USB stack for MCUXpresso SDK 2.7.0

Copyright (c) 2020-2021 NXP Semiconductors. All right reserved.

The BSD 3 Clause License

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

CMSIS 5.6.0

Copyright (c) 2020-2021 Arm Limited. All rights reserved.

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but

excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and

do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "{}" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright {yyyy} {name of copyright owner}

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

F-755-100-36(1) Copyright 2021 Sony Corporation

Juridische informatie



Lees voorafgaand aan het gebruik de apart meegeleverde brochure Belangrijke informatie.

Deze Helpgids is zonder enige garantie gepubliceerd door Sony Corporation of een lokale gelieerde onderneming. Sony Corporation kan te allen tijde en zonder voorafgaande kennisgeving verbeteringen en wijzigingen aan deze Helpgids aanbrengen op grond van typografische fouten, onjuiste of achterhaalde gegevens of verbeteringen aan programmatuur en/of apparatuur. Dergelijke wijzigingen worden wel in nieuwe uitgaven van deze Helpgids verwerkt.

1-7-1 Konan Minato-ku Tokio, 108-0075 Japan

Fabrikant: Sony Corporation

Importeur / gemachtigd vertegenwoordiger van de fabrikant voor de EU: Sony Europe B.V., Da Vincilaan 7-D1, 1930 Zaventem, België.

Importeur / gemachtigd vertegenwoordiger van de fabrikant voor het VK: Sony Europe B.V., The Heights, Brooklands, Weybridge, Surrey KT13 0XW, Verenigd Koninkrijk.

Alle hierin genoemde namen van producten en bedrijven zijn handelsmerken of geregistreerde handelsmerken van hun respectieve eigenaren. Alle rechten die hierin niet uitdrukkelijk worden verleend, zijn voorbehouden. Alle andere handelsmerken zijn het eigendom van hun respectieve eigenaren.

Ga naar <https://www.sony.net/Products/smartphones/trademarks-and-copyright.html> voor meer informatie.

Alle afbeeldingen zijn uitsluitend bedoeld ter illustratie en vormen mogelijk geen exacte weergave van het daadwerkelijke accessoire.

FCC Statement

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

“Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.”

Supplier's Declaration of Conformity

Trade Name : Sony

Model : AI-1500

Responsible Party : Sony Electronics Inc.

Address : 16535 Via Esprillo, San Diego, CA 92127 U.S.A.

Telephone Number : 858-942-2230