



Forberede

[Om denne hjelpeveiledningen](#)

[Identifisere delene](#)

[Feste et grep](#)

[Feste en smarttelefon](#)

[Feste skjermen](#)

[Koble til en smarttelefon](#)

[Feste en mikrofon](#)

Bruke som et selfie-speil

[Opptak](#)

[Opptak under lading av en smarttelefon](#)

Programvarelisens, juridisk informasjon

[Om programvarelisensen](#)

[Juridisk informasjon](#)

Vlog-monitor
XQZ-IV01

Om denne hjelpeveiledningen

Dette er hjelpeveiledningen til Vlog-monitor XQZ-IV01.

Merknad

- System- og appopdateringer kan føre til at funksjonene på enheten vises på en annen måte enn slik det er beskrevet i denne hjelpeveiledningen.

Merknader om bruk

Husk å lese "Viktig informasjon" som følger med.

Oversikt over denne enheten


Fest denne enheten på bakre side av Xperia og kombiner den med et stativ, e.l. for å ta selfier med hovedkameraet til Xperia.

Xperia-modellen kompatibel med denne enheten som følger.

- Sony Smarttelefon Xperia PRO-I (DC 5,0 V / 0,4 A)
- Sony Smarttelefon Xperia 1 VI (DC 5,0 V / 0,4 A)
- Sony Smarttelefon Xperia 1 V (DC 5,0 V / 0,4 A)
- Sony Smarttelefon Xperia 1 IV (DC 5,0 V / 0,4 A)
- Sony Smarttelefon Xperia 5 V (DC 5,0 V / 0,4 A)
- Sony Smarttelefon Xperia 5 IV (DC 5,0 V / 0,4 A)


Identifisere delene

Skjerm

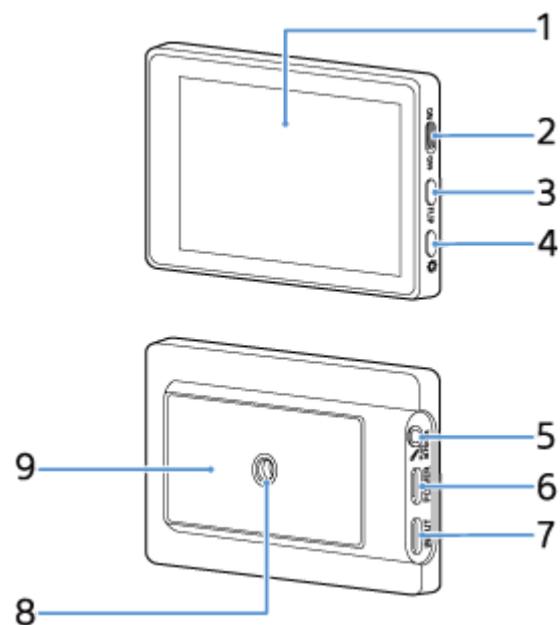

1. LCD-skjerm (størrelse: 3,5 tommer / oppløsning: 1280 × 720)
2. ON/OFF (Skjerm PÅ/AV)-bryter
3. FLIP (Skjermflipp)-knapp
4. ⚙️ (Lysstyrkekontroll)-knapp
5. 🎤 Mikrofonkontakt
6. POWER (Lade)-port
7. INPUT (Inngang)-port
8. Kontakthull for stativ
9. Festeområde for holder

Holder

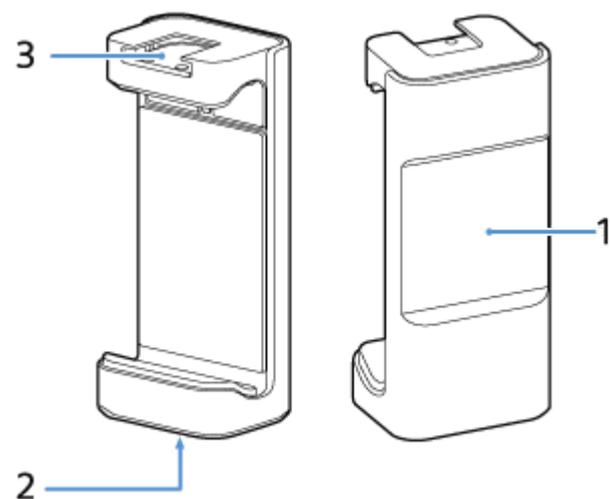

1. Magnet for festing av skjerm
2. Kontakthull for stativ
3. Tilbehørssko

Tilkoblingskabel




F-755-100-46(1) Copyright 2021 Sony Corporation

Feste et grep

Feste et grep med en kameramonteringskrue.

- 1 Før kameramonteringskruen til grepet inn i kontakthullet for stativ på holderen.

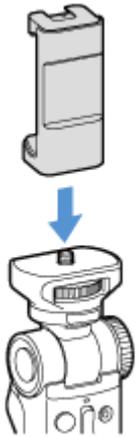

- 2 Drei festehjulet for kamera på grepet for å sikre holderen på plass.




Merknad


- Bruk et stativ med en skrue som er kortere enn 5,5 mm. Holderen kan ikke sikkert festes til et stativ med en skrue som er 5,5 mm eller lengre, og dette kan skade enheten.

Feste en smarttelefon

- 1 Plasser holderen mellom kameratasten (a) og strømknappen (b) på smarttelefonen.

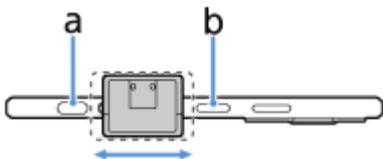


- 2 Plasser smarttelefonen på toppen av holderen.

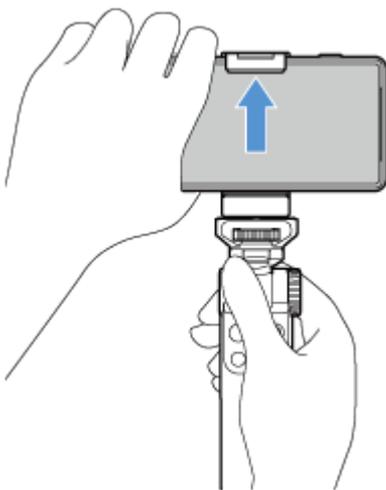


- 3 Fest smarttelefonen til bunnen av holderen.

Sett smarttelefonen på plass så det ikke er mellomrom mellom holderen og smarttelefonen.

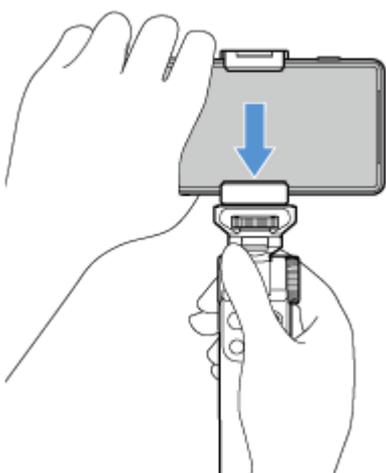

Merknad

- Vær forsiktig så du ikke klemmer fingeren mellom holderen og smarttelefonen. Dette kan føre til klemskade.

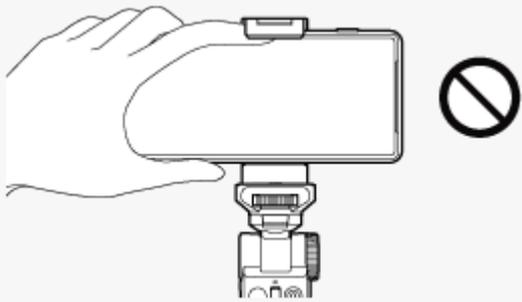


- Fest smarttelefonen forsiktig for å unngå riper.


F-755-100-46(1) Copyright 2021 Sony Corporation

Feste skjermen

- 1 Sett sammen magneten til holderen (a) og festeområde for holder på skjermen (b) for å feste skjermen godt.

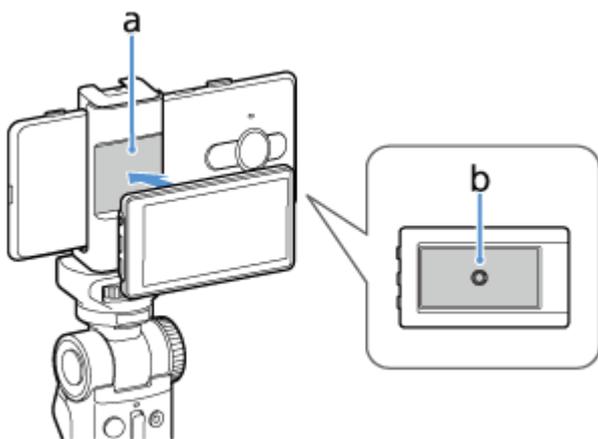

- 2 Tilpass skjermens posisjon.

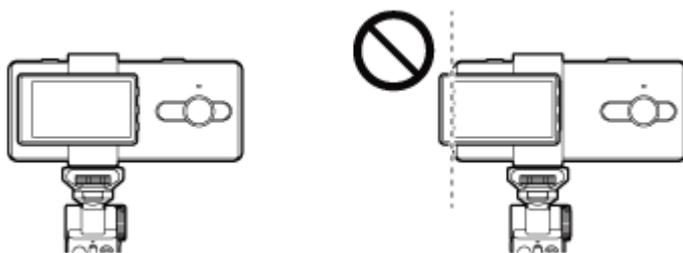


- Sjekk at skjermen ikke dekker til kameraet på smarttelefonen.
- Ikke la venstre side av skjermen stikke ut av smarttelefonen. Dette kan forstyrre kommunikasjonen.

Merknad

- Feil festing av skjermen kan føre til at skjermen faller ned, som kan forårsake personskade eller feil på enheten.

Vlog-monitor
XQZ-IV01

Koble til en smarttelefon

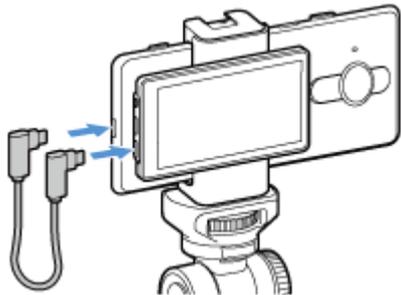

- 1 Koble én ende av tilkoblingskabelen som følger med denne enheten til smarttelefonen.
- 2 Koble den andre enden av tilkoblingskabelen til INPUT (Inngang)-porten på skjermen.


Merknad

- Hvis du kobler fra tilkoblingskabelen under opptak vil opptaket stoppe. En melding vises da på smarttelefonen om å koble til enheten på nytt. Følg instruksene.
- Vi kan ikke garantere ytelse hvis du bruker en annen kabel enn tilkoblingskabelen som følger med denne enheten. Bruk alltid tilkoblingskabelen som følger med.
- Når tilkoblingskabelen er koblet til, blinker skjermen i et øyeblikk på grunn av strømtilførsel. Dette er ikke en feil.

Feste en mikrofon

Du kan feste en mikrofon til tilbehørsskoen på denne enheten. Se bruksanvisningen til mikrofonen.


- 1 Sett foten på mikrofonen på linje med tilbehørsskoen på holderen og fest mikrofonen.

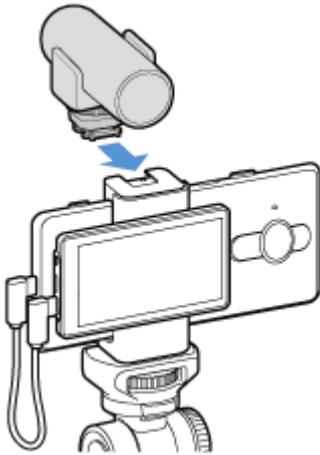

- 2 Drei låseknaen på mikrofonen for å sette mikrofonen godt i holderen.



- 3 Koble mikrofonen til mikrofonkontakten på skjermen med tilkoblingskabelen som følger med mikrofonen.

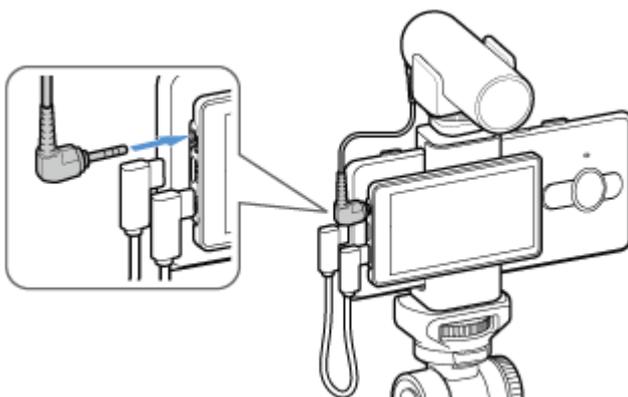

Hint

- Den interne mikrofonen til smarttelefonen settes automatisk til den eksterne mikrofonen når en mikrofon er koblet til mikrofonkontakten til skjermen på denne enheten.

Merknad


- Koble til mikrofonen før du åpner appen.

F-755-100-46(1) Copyright 2021 Sony Corporation

Opptak


1 Slå på strømmen til smarttelefonen og åpne en kompatibel app.

Eksempel: Photography Pro, Videography Pro



2 Sett ON/OFF (Skjerm PÅ/AV)-bryter til "ON".

Et kamerabilde mates ut fra smarttelefonen til LCD-skjermen til denne enheten.

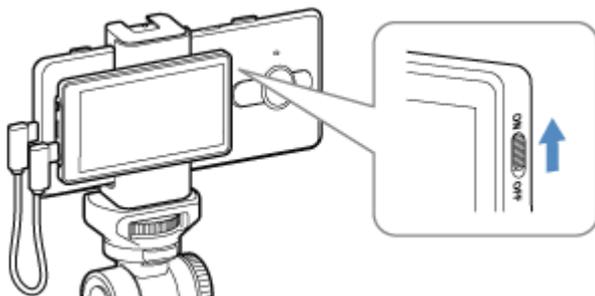

Slik flipper du skjermen

Trykk på FLIP (Skjermflipp)-knappen.

Skjermorienteringen endres som følger hver gang knappen trykkes.

Speilet → Ekte → Ekte, Opp-ned → Speilet, Opp-ned

Slik justerer du lysstyrken


Trykk på  (Lysstyrkekontroll)-knappen.

Lysstyrken endres som følger hver gang knappen trykkes.

Høy → Boost → Lav → Mid

Opptak under lading av en smarttelefon

Du kan gjøre opptak under lading av smarttelefonen koblet til denne enheten med en USB-kabel for lading av smarttelefoner.

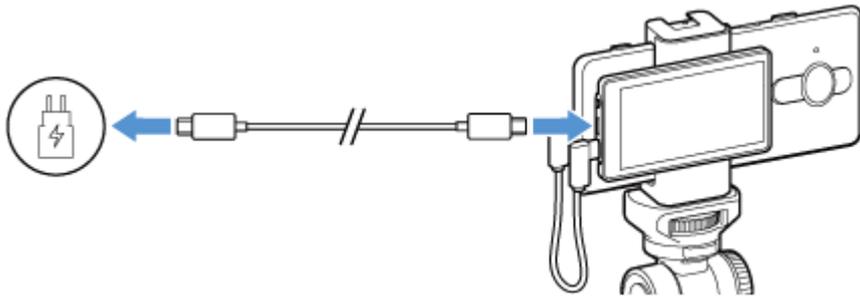

- 1 Koble denne enheten til en smarttelefon.
- 2 Koble én ende av USB-kabelen til USB-porten på laderen.
- 3 Koble laderen til et strømuttak.
- 4 Koble den andre enden av USB-kabelen til POWER (lade)-porten på denne enheten.

Merknad

- Hvis du kobler fra USB-kabelen ved opptak under lading vil opptaket stoppe. En melding vises da på smarttelefonen om å koble til enheten på nytt. Følg instruksene.
- Hvis smarttelefonen er slått av, kan den ikke lades via denne enheten.
- Ikke la smarttelefonen være koblet til denne enheten og laderen mens den er slått av. Dette kan føre til feil på smarttelefonen.
- Du må alltid bruke følgende originale Sony-laderen og USB-kabelen da andre ladere og kabler kan øke ladetiden, ikke lade i det hele tatt eller til og med skade enheten.
 - Laderen og kabelen som følger med Xperia-modellen som er kompatibel med denne enheten
 - Sony Hurtiglader XQZ-UC1 (DC 5,0 V / 3,0 A) og USB-kabel
- INPUT-porten og POWER-porten på denne enheten er USB Type-C®.
- Bruk alltid tilkoblingskabelen som følger med for å koble denne enheten til en smarttelefon. Vi kan ikke garantere ytelse hvis du bruker en annen kabel enn tilkoblingskabelen som følger med denne enheten.
- Når du kobler en lader til denne enheten forsynes strøm fra POWER-porten til INPUT-porten og deretter til smarttelefonen.
- Utgående strømrangering fra INPUT-porten til denne enheten til smarttelefonen er DC 5,0 V / 2,6 A.

Vlog-monitor
XQZ-IV01

Om programvarelisensen

Denne delen omhandler programvaren som brukes av dette produktet.

Notices for file(s):

SDK components and board peripheral drivers

SDK examples (USB VCOM)

SDK examples (PD)

SDK Peripheral Driver

SDK SoC files

USB USB stack for MCUXpresso SDK 2.7.0

Copyright (c) 2020-2021 NXP Semiconductors. All right reserved.

The BSD 3 Clause License

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

CMSIS 5.6.0

Copyright (c) 2020-2021 Arm Limited. All rights reserved.

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but

excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and

do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "{}" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright {yyyy} {name of copyright owner}

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

F-755-100-46(1) Copyright 2021 Sony Corporation

Vlog-monitor
XQZ-IV01

Juridisk informasjon



Les det separate heftet Viktig informasjon før bruk.

Denne hjelpeveiledningen er utgitt av Sony Corporation eller dets lokale tilknyttede selskap, uten garantier av noe slag. Forbedringer og endringer i denne hjelpeveiledningen som skyldes typografiske feil, unøyaktigheter i gjeldende informasjon eller forbedringer av program og/eller utstyr, kan foretas av Sony Corporation, når som helst og uten varsel. Slike endringer vil imidlertid bli tatt med i nye utgaver av denne hjelpeveiledningen.

1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Produsent: Sony Corporation

EU-importør/produsents autoriserte representant: Sony Europe B.V., Da Vincilaan 7-D1, 1930 Zaventem, Belgia.

Importør/produsent i Storbritannias autoriserte representant: Sony Europe B.V., The Heights, Brooklands, Weybridge, Surrey KT13 0XW, Storbritannia.

Alle produkt- og firmanavn som nevnes i dette dokumentet, er varemerker eller registrerte varemerker for sine respektive eiere. Alle rettigheter som ikke uttrykkelig gis i dette dokumentet, forbeholdes. Alle andre varemerker tilhører sine respektive eiere.

Gå til <https://www.sony.net/Products/smartphones/trademarks-and-copyright.html> for å få mer informasjon.

Alle illustrasjoner er kun for illustrasjonsformål og stemmer ikke nødvendigvis med det faktiske tilbehøret.

Vlog-monitor
XQZ-IV01

FCC Statement

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

“Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.”

Supplier's Declaration of Conformity

Trade Name : Sony

Model : AI-1500

Responsible Party : Sony Electronics Inc.

Address : 16535 Via Esprillo, San Diego, CA 92127 U.S.A.

Telephone Number : 858-942-2230