

Μόνιτορ για σέλφι βίντεο
XQZ-IV01



Προετοιμασία

[Σχετικά με αυτόν τον Οδηγό βοήθειας](#)

[Προσδιορισμός των μερών](#)

[Τοποθέτηση λαβής](#)

[Τοποθέτηση smartphone](#)

[Τοποθέτηση της οθόνης](#)

[Σύνδεση smartphone](#)

[Τοποθέτηση μικροφώνου](#)

Χρήση ως μόνιτορ για σέλφι βίντεο

[Λήψη](#)

[Λήψη κατά τη διάρκεια της φόρτισης του smartphone](#)

Άδεια λογισμικού, Νομικές πληροφορίες

[Σημειώσεις σχετικά με την άδεια λογισμικού](#)

[Νομικές πληροφορίες](#)

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Σχετικά με αυτόν τον Οδηγό βοήθειας

Αυτός είναι ο Οδηγός βοήθειας για το Μόνιτορ για σέλφι βίντεο XQZ-IV01.

Σημείωση

- Οι ενημερώσεις συστήματος και εφαρμογών μπορεί να εμφανίσουν τις λειτουργίες της συσκευής σας με διαφορετικό τρόπο από εκείνον που περιγράφεται σε αυτό τον Οδηγό βοήθειας.

Σημειώσεις σχετικά με τη χρήση

Βεβαιωθείτε ότι έχετε διαβάσει τις "Σημαντικές πληροφορίες" που παρέχονται.

Επισκόπηση της μονάδας


Τοποθετήστε αυτήν τη μονάδα στο πίσω μέρος του Xperia και συνδυάστε τη με ένα τρίποδο, κ.λπ. προκειμένου να τραβήξετε σέλφι με την κύρια κάμερα του Xperia.

Το παρακάτω μοντέλο Xperia είναι συμβατό με αυτήν τη μονάδα.

- Sony Smartphone Xperia PRO-I (DC5.0V / 0.4A)
- Sony Smartphone Xperia 1 VI (DC5.0V / 0.4A)
- Sony Smartphone Xperia 1 V (DC5.0V / 0.4A)
- Sony Smartphone Xperia 1 IV (DC5.0V / 0.4A)
- Sony Smartphone Xperia 5 V (DC5.0V / 0.4A)
- Sony Smartphone Xperia 5 IV (DC5.0V / 0.4A)


Προσδιορισμός των μερών

Οθόνη

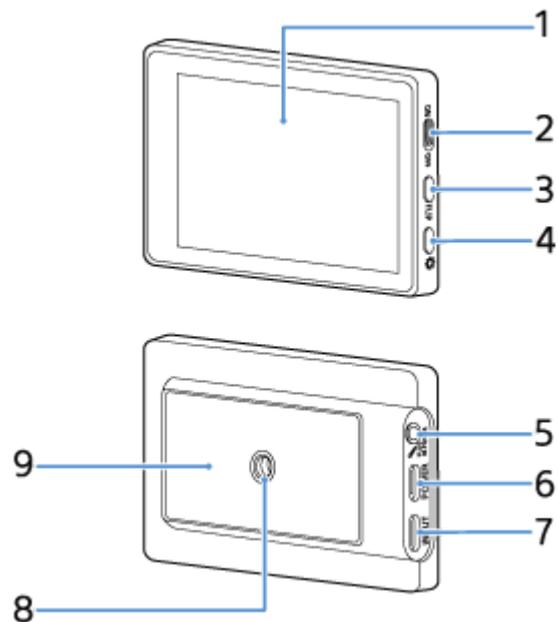

1. Οθόνη LCD (μέγεθος: 3,5 ίντσες / ανάλυση: 1280 × 720)
2. Διακόπτης ON/OFF (ON/OFF οθόνης)
3. Κουμπί FLIP (Αναστροφή οθόνης)
4. Κουμπί ⚙️ (Έλεγχος φωτεινότητας)
5. Υποδοχή μικροφώνου 🎤
6. Θύρα POWER (Φόρτιση)
7. Θύρα INPUT (Είσοδος)
8. Οπή υποδοχής τριπόδου
9. Σημείο τοποθέτησης θήκης

Θήκη

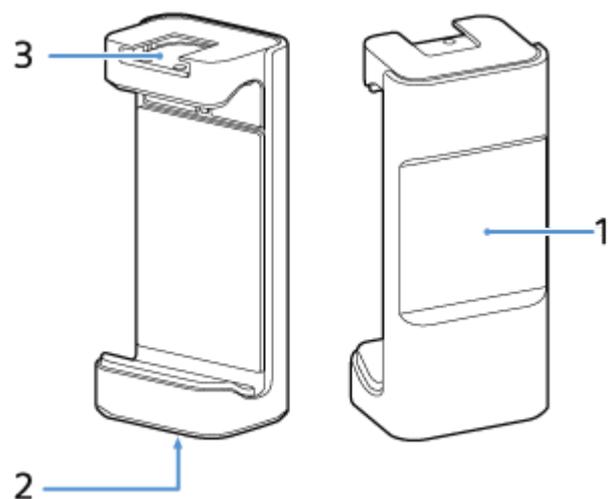

1. Μαγνήτης τοποθέτησης οθόνης
2. Οπή υποδοχής τριπόδου
3. Πέδιλο εξαρτημάτων

Καλώδιο σύνδεσης




F-754-100-66(1) Copyright 2021 Sony Corporation

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Τοποθέτηση λαβής

Τοποθετήστε μια λαβή με βίδα στερέωσης κάμερας.

- 1 Τοποθετήστε τη βίδα στερέωσης κάμερας της λαβής στην οπή υποδοχής τριπόδου της θήκης.

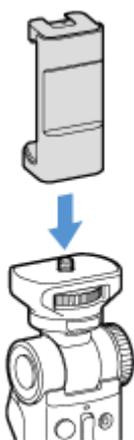

- 2 Περιστρέψτε τον τροχό στερέωσης κάμερας της λαβής για να ασφαλίσετε τη θήκη.




Σημείωση


- Χρησιμοποιήστε τρίποδο με βίδα κάτω των 5,5 mm. Η θήκη δεν μπορεί να τοποθετηθεί με σταθερότητα σε τρίποδο με βίδα των 5,5 mm και άνω και αυτό θα προκαλέσει βλάβη στη μονάδα.

Τοποθέτηση smartphone

- 1 Τοποθετήστε τη θήκη ανάμεσα στο πλήκτρο κάμερας (a) και το πλήκτρο λειτουργίας (b) του smartphone.

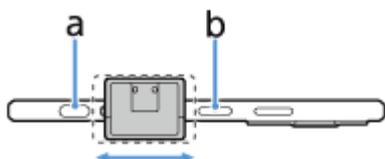


- 2 Τοποθετήστε το smartphone επάνω στη θήκη.

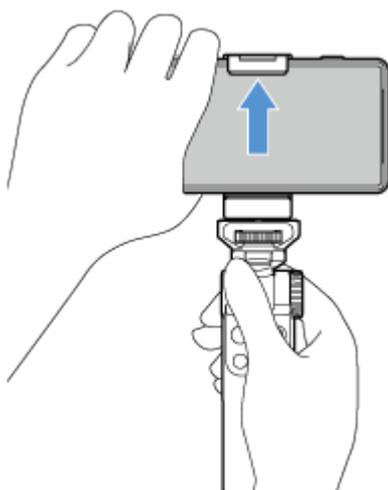


- 3 Προσαρμόστε το smartphone στο κάτω μέρος της θήκης.

Τοποθετήστε το smartphone έτσι ώστε να εφαρμόσει καλά και να μην υπάρχουν κενά μεταξύ της θήκης και του smartphone.

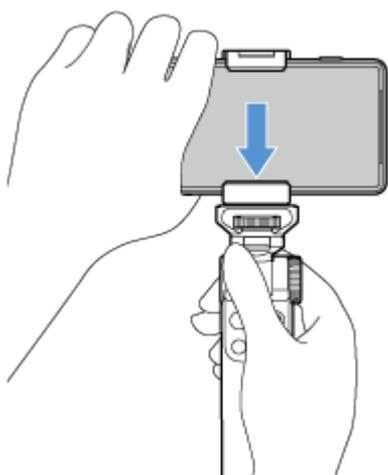

- Προσέξτε να μην μαγκώσετε το δάκτυλό σας μεταξύ της θήκης και του smartphone. Μπορεί να προκληθεί σωματική βλάβη.

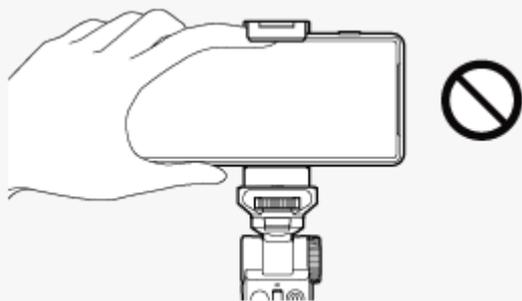


- Τοποθετήστε το smartphone προσεκτικά ώστε να μην προκληθούν γρατσουνιές.


F-754-100-66(1) Copyright 2021 Sony Corporation

Τοποθέτηση της οθόνης

- 1 Πλησιάστε τον μαγνήτη της θήκης (a) και το σημείο τοποθέτησης θήκης της οθόνης (b) για να τοποθετήσετε την οθόνη με τρόπο ώστε να εφαρμόζει καλά.

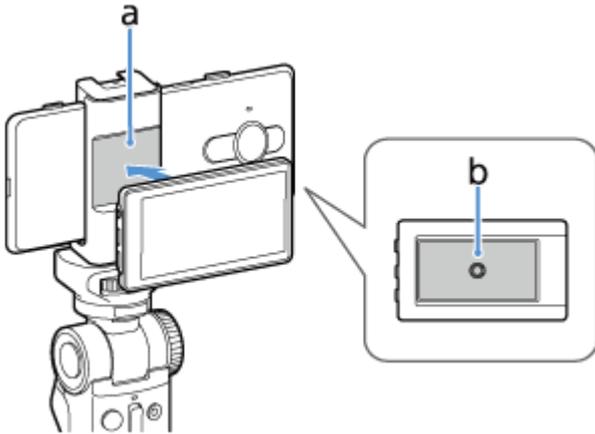

- 2 Ρυθμίστε τη θέση της οθόνης.

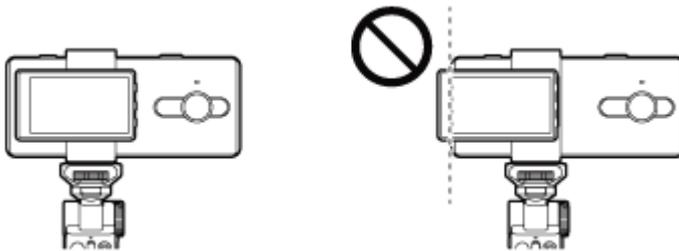


- Βεβαιωθείτε ότι η οθόνη δεν καλύπτει την κάμερα του smartphone.
- Μην αφήνετε την αριστερή πλευρά της οθόνης να εξέχει από το smartphone. Ενδέχεται να διαταράξει την επικοινωνία.

Σημείωση

- Η λανθασμένη τοποθέτηση της οθόνης μπορεί να προκαλέσει την πτώση της οθόνης, σωματική βλάβη ή δυσλειτουργία αυτής της μονάδας.

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Σύνδεση smartphone

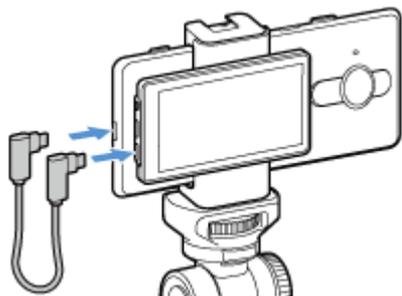

- 1 Συνδέστε το ένα άκρο του καλωδίου σύνδεσης που παρέχεται με αυτήν την οθόνη στο smartphone.
- 2 Συνδέστε το άλλο άκρο του καλωδίου σύνδεσης στη θύρα INPUT (Είσοδος) της οθόνης.

Σημείωση


- Εάν αποσυνδέσετε το καλώδιο σύνδεσης κατά τη λήψη, η λήψη θα διακοπεί. Τότε ενδέχεται να εμφανιστεί μήνυμα στο smartphone για να επανασυνδέσετε τη μονάδα. Ακολουθήστε τις οδηγίες.
- Δεν μπορούμε να εγγυηθούμε την απόδοση εάν χρησιμοποιήσετε άλλο καλώδιο και όχι το καλώδιο σύνδεσης που παρέχεται με αυτήν τη μονάδα. Χρησιμοποιείτε πάντα το καλώδιο σύνδεσης που παρέχεται.
- Όταν συνδεθεί το καλώδιο σύνδεσης, η οθόνη αναβοσβήνει για μια στιγμή λόγω της ενεργοποίησης. Δεν πρόκειται για δυσλειτουργία.

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Τοποθέτηση μικροφώνου

Μπορείτε να τοποθετήσετε μικρόφωνο στο πέλδilo εξαρτημάτων αυτής της μονάδας. Ανατρέξτε επίσης στο εγχειρίδιο χρήσης του μικροφώνου σας.


- 1 Ευθυγραμμίστε τη βάση του μικροφώνου με το πέλδilo εξαρτημάτων στη θήκη και τοποθετήστε το μικρόφωνο.

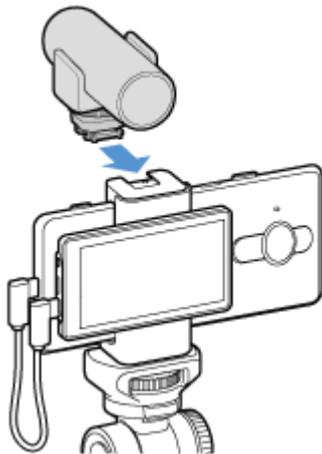

- 2 Περιστρέψτε το κομβίο ασφάλισης του μικροφώνου για να ασφαλίσετε το μικρόφωνο στη θήκη.



- 3 Συνδέστε το μικρόφωνο στην υποδοχή μικροφώνου της οθόνης με το καλώδιο σύνδεσης που παρέχεται με το μικρόφωνο.

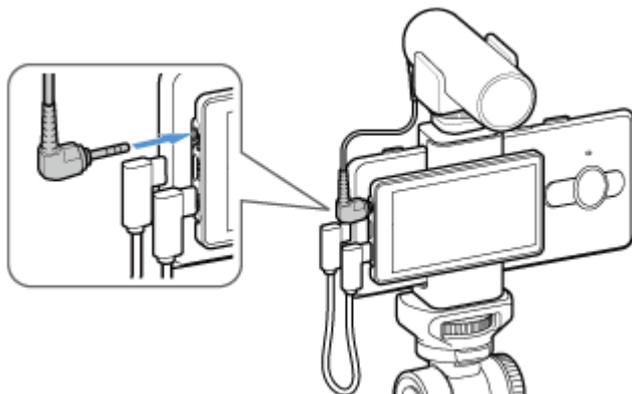

Υπόδειξη

- Γίνεται αυτόματα εναλλαγή από το εσωτερικό μικρόφωνο του smartphone στο εξωτερικό μικρόφωνο όταν συνδέεται μικρόφωνο στην υποδοχή μικροφώνου  της οθόνης αυτής της μονάδας.

Σημείωση

- Συνδέστε το μικρόφωνο πριν την εκκίνηση της εφαρμογής.


F-754-100-66(1) Copyright 2021 Sony Corporation

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Λήψη


1 Ενεργοποιήστε το smartphone και κάνετε εκκίνηση μιας συμβατής εφαρμογής.

Παράδειγμα: Photography Pro, Videography Pro



2 Θέστε τον διακόπτη ON/OFF (ON/OFF οθόνης) στο "ON".

Από το smartphone εξάγεται μια εικόνα κάμερας προς την οθόνη LCD αυτής της μονάδας.

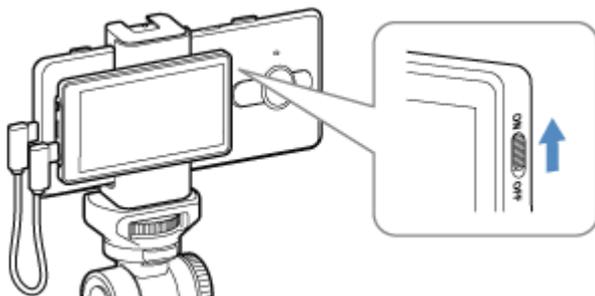

Για να αναστρέψετε την οθόνη

Πατήστε το κουμπί FLIP (Αναστροφή οθόνης).

Ο προσανατολισμός της οθόνης αλλάζει ως εξής κάθε φορά που πατάτε το κουμπί.

Καθρέφτης → Πραγματικό → Πραγματικό, Αναποδογυρισμένο → Καθρέφτης, Αναποδογυρισμένο

Για να προσαρμόσετε τη φωτεινότητα

Πατήστε το κουμπί  (Έλεγχος φωτεινότητας).


Ο φωτεινότητα αλλάζει ως εξής κάθε φορά που πατάτε το κουμπί.

Υψηλή → Ενισχυμένη → Χαμηλή → Μεσαία

Μόνιτορ για σέλιφι βίντεο
XQZ-IV01

Λήψη κατά τη διάρκεια της φόρτισης του smartphone

Μπορείτε να κάνετε λήψη όσο φορτίζετε το smartphone που είναι συνδεδεμένο με αυτήν τη μονάδα χρησιμοποιώντας καλώδιο USB για τη φόρτιση smartphone.

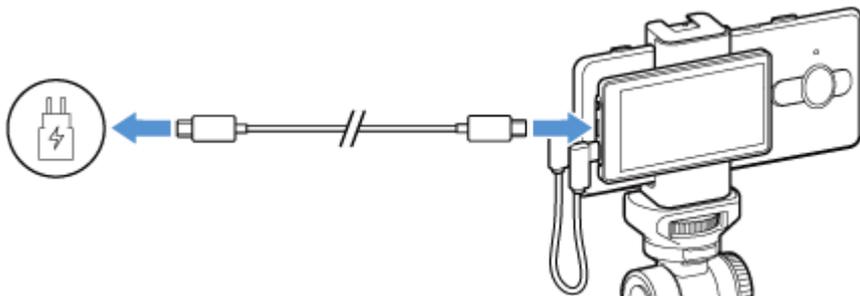

- 1 Συνδέστε αυτήν τη μονάδα με ένα smartphone.
- 2 Συνδέστε το ένα άκρο του καλωδίου USB στη θύρα USB ενός φορτιστή.
- 3 Συνδέστε τον φορτιστή σε μια πρίζα.
- 4 Συνδέστε το άλλο άκρο του καλωδίου USB στη θύρα POWER (φόρτιση) της οθόνης.

Σημείωση

- Εάν αποσυνδέσετε το καλώδιο USB όταν κάνετε λήψη κατά τη διάρκεια φόρτισης, η λήψη θα διακοπεί. Τότε ενδέχεται να εμφανιστεί μήνυμα στο smartphone για να επανασυνδέσετε τη μονάδα. Ακολουθήστε τις οδηγίες.
- Εάν το smartphone είναι απενεργοποιημένο δεν είναι δυνατό να φορτίσει μέσω της μονάδας.
- Μην αφήνετε το smartphone συνδεδεμένο με τη μονάδα και τον φορτιστή όσο είναι απενεργοποιημένο. Ενδέχεται να προκληθεί δυσλειτουργία στο smartphone.
- Χρησιμοποιείτε πάντα τον γνήσιο φορτιστή της Sony και ένα καλώδιο USB καθώς άλλοι τύποι φορτιστών ενδέχεται να αυξήσουν το χρόνο φόρτισης, να μη φορτίζουν καθόλου τη συσκευή ή ακόμη και να προκαλέσουν βλάβη στη συσκευή.
 - Ο φορτιστής και το καλώδιο που παρέχονται με το μοντέλο Χρεια που είναι συμβατό με αυτήν την μονάδα
 - Γρήγορος φορτιστής Sony XQZ-UC1 (DC5.0V / 3.0A) και καλώδιο USB
- Η θύρα INPUT και η θύρα POWER αυτής της μονάδας είναι USB Type-C®.
- Για να συνδέσετε αυτήν τη μονάδα με ένα smartphone, χρησιμοποιείτε πάντα το καλώδιο σύνδεσης που παρέχεται. Δεν μπορούμε να εγγυηθούμε την απόδοση εάν χρησιμοποιήσετε άλλο καλώδιο και όχι το καλώδιο σύνδεσης που παρέχεται με αυτήν τη μονάδα.
- Όταν συνδέετε φορτιστή σε αυτήν τη μονάδα, η ισχύς εισέρχεται από τη θύρα POWER στη θύρα INPUT και στη συνέχεια στο smartphone.
- Η ονομαστική τιμή εξόδου από τη θύρα INPUT αυτής της μονάδας στο smartphone είναι DC5.0V / 2.6A.

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Σημειώσεις σχετικά με την άδεια λογισμικού

Αυτή η παράγραφος καλύπτει το λογισμικό που χρησιμοποιείται για αυτό το προϊόν.

Notices for file(s):

SDK components and board peripheral drivers

SDK examples (USB VCOM)

SDK examples (PD)

SDK Peripheral Driver

SDK SoC files

USB USB stack for MCUXpresso SDK 2.7.0

Copyright (c) 2020-2021 NXP Semiconductors. All right reserved.

The BSD 3 Clause License

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

CMSIS 5.6.0

Copyright (c) 2020-2021 Arm Limited. All rights reserved.

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but

excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and

do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "{}" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright {yyyy} {name of copyright owner}

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

F-754-100-66(1) Copyright 2021 Sony Corporation

Μόνιτορ για σέλφι βίντεο
XQZ-IV01

Νομικές πληροφορίες



Πριν από τη χρήση, διαβάστε το φυλλάδιο Σημαντικές πληροφορίες που παρέχεται ξεχωριστά.

Αυτός ο Οδηγός βοήθειας δημοσιεύεται από τη Sony Corporation ή την τοπική θυγατρική εταιρεία της, χωρίς καμία εγγύηση. Βελτιώσεις και αλλαγές σε αυτόν τον Οδηγό βοήθειας λόγω τυπογραφικών λαθών, ανακρίβειών των τρεχόντων στοιχείων ή βελτιώσεων προγραμμάτων ή/και εξοπλισμού μπορούν να γίνουν από τη Sony Corporation ανά πάσα στιγμή και χωρίς καμία προειδοποίηση. Ωστόσο, τέτοιες αλλαγές θα ενσωματώνονται στις νέες εκδόσεις αυτού του Οδηγού βοήθειας.

1-7-1 Konan Minato-ku Τόκιο, 108-0075 Ιαπωνία

Κατασκευαστής: Sony Corporation

Εξουσιοδοτημένος εισαγωγέας/αντιπρόσωπος του κατασκευαστή στην ΕΕ: Sony Europe B.V., Da Vincilaan 7-D1, 1930 Zaventem, Βέλγιο.

Εξουσιοδοτημένος εισαγωγέας/αντιπρόσωπος του κατασκευαστή στο Ηνωμένο Βασίλειο: Sony Europe B.V., The Heights, Brooklands, Weybridge, Surrey KT13 0XW, Ηνωμένο Βασίλειο.

Όλα τα ονόματα προϊόντων και εταιρειών που αναφέρονται στο παρόν αποτελούν εμπορικά σήματα ή σήματα κατατεθέντα των αντίστοιχων κατόχων τους. Επιφυλασσόμαστε όλων των δικαιωμάτων τα οποία δεν παραχωρούνται ρητά στο παρόν. Όλα τα υπόλοιπα εμπορικά σήματα αποτελούν ιδιοκτησία των αντίστοιχων κατόχων τους.

Για περισσότερες πληροφορίες, επισκεφτείτε τη διεύθυνση <https://www.sony.net/Products/smartphones/trademarks-and-copyright.html>.

Όλες οι εικόνες προορίζονται μόνο για σκοπούς απεικόνισης και ενδέχεται να μην αναπαριστούν με ακρίβεια το πραγματικό αξεσουάρ.

Μόνιτορ για σέλιφι βίντεο
XQZ-IV01

FCC Statement

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

“Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.”

Supplier's Declaration of Conformity

Trade Name : Sony

Model : AI-1500

Responsible Party : Sony Electronics Inc.

Address : 16535 Via Esprillo, San Diego, CA 92127 U.S.A.

Telephone Number : 858-942-2230